

# A weakly universal cellular automaton in the hyperbolic 3D space with three states

Maurice MARGENSTERN

Université Paul Verlaine – Metz, IUT de Metz,  
LITA EA 3097, UFR MIM,

Campus du Saulcy,  
57045 METZ Cédex 1, FRANCE

*e-mail:* margens@univ-metz.fr *Web page:*

<http://www.lita.sciences.univ-metz.fr/~margens>

**Abstract** — In this paper, we significantly improve a previous result by the same author showing the existence of a weakly universal cellular automaton with five states living in the hyperbolic 3D-space. Here, we get such a cellular automaton with three states only.

**Key words:** cellular automata, weak universality, hyperbolic spaces, tilings.

## 1 Introduction

In this paper, we follow the track of previous papers by the same author, with various collaborators or alone, see [2, 7, 12, 13, 10, 9], which make use of the same basic model, the *railway model*, see [15, 5, 9] which we again define in Section 2 for the self-containdness of the paper. Also for self-containdness, in Section 3, we remind the reader what is needed to know about hyperbolic geometry, focusing on the tilings of the hyperbolic plane and on the dodecagrid, the tiling of the hyperbolic 3D space which we use for our implementation in this paper.

In [10], I proved the existence of a weakly cellular automaton on the heptagrid, a tiling of the hyperbolic plane, with four states only. This result improves a published former result of the same author with a co-author, see [12], in the same tiling of the hyperbolic plane, using a cellular automaton with 6 states.

The reduction for 6 states to 4 states, using the same model, was obtained by replacing the implementation of the tracks of the railway model. In all previous papers, the track is implemented as a kind of one-dimensional structure: each cell of the track has two other neighbours on the track exactly, considering that the cell also belongs to its neighbourhood. The locomotive follows the track by successively replacing two cells of the track: the cells occupied by the front and by the rear of the locomotive. The locomotive has its own colours and the track has another one which is also different from the blank, the colour of the quiescent state. In the mentioned paper, this traditional implementation is replaced by a new one, where the track in the traditional meaning is not materialized but suggested only. It is suggested by *milestones* which delimit it. It is important to notice that the milestone may not define a continuous structure.

At this point, my attention was drawn by a referee of a submission to a journal explaining the 4-state result that it is easy to implement rule 110 in

the heptagrid, using three states only. This is true, but this trick produces an automaton which is not really a planar automaton and does not improve our knowledge neither on rule 110 nor on cellular automata in the hyperbolic plane. This implementation with three states is can also be easily adapted to the dodecagrid of the hyperbolic  $3D$  space and suffers the same defect of bringing in no new idea.

In this paper, we follow the same idea as in the heptagrid, which consists in changing the definition of the track. The milestones are also implemented in two versions, as in the planar case. However, due to a particularity of the implementation, the same pattern can be used to change directions, either inside a plane of the hyperbolic  $3D$  space or to switch from one plane to another one. This configuration is used to avoid crossings, replacing them by bridges, as this was already performed in [7]. Sections 4 and 5 thoroughly describe the implementation of the model in the hyperbolic  $3D$  space. Section 6 explains how the rules implement the model, focusing on their rotation invariance, and also giving a short account on the computer program which we used to perform the simulation and to check the correctness of the rules.

This will conclude our proof of the following result:

**Theorem 1** (Margenstern) – *There is a cellular automaton in the dodecagrid of the hyperbolic  $3D$  space which is weakly universal and which has 3 states. Moreover, the cellular automaton is rotation invariant and its motion actually makes use of the three dimensions.*

By the latter expression, we mean that the automaton cannot be reduced to a lower dimension by a simple projection.

## 2 The railway model

The model which we use in this paper is a schematizing of a railway circuit initially devised by Ian Stewart, see [15]. This model was later intensively used by the present author and several co-authors in in [5, 2, 7, 13, 12, 9], following the simulation of a register machine defined in [5] in various tilings of the hyperbolic plane and in one tiling of the hyperbolic  $3D$  space.

In this section, we represent a Euclidean implementation of the circuit in order to facilitate the assimilation of the model by the reader. We turn to the implementation in a hyperbolic context later, after a short reminder of hyperbolic geometry and what is needed to remember about tilings in these spaces.

The circuit uses tracks represented by lines and switches. Both make use of straight segments and quarters of circles. There are three kinds of switches: the **fixed**, the **memory** and the **flip-flop** switches. They are represented by the schemes given in Figure 1.


A switch is an oriented structure: on one side, it has a single track  $u$  and, on the other side, it has two tracks  $a$  and  $b$ . This defines two ways of crossing a switch. Call the way from  $u$  to  $a$  or  $b$  **active**. Call the other way, from  $a$  or  $b$

to **passive**. The name comes from the fact that in a passive way, the switch plays no role on the trajectory of the locomotive. On the contrary, in an active crossing, the switch indicates which track between  $a$  and  $b$  will be followed by the locomotive after running on  $u$ : the new track is called the **selected** track.



**Figure 1** The three kinds of switches. From left to right: fixed, flip-flop and memory switches.

With the help of these three kinds of switches, we define an **elementary circuit** as in [15], which exactly contains one bit of information. The circuit is illustrated by Figure 2, below. It can be remarked that the working of the circuit strongly depends on how the locomotive enters it.

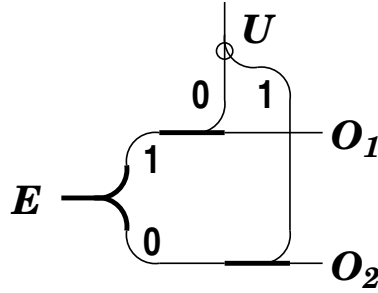

**Figure 2** The elementary circuit.


If the locomotive enters the circuit through  $E$ , it leaves it through  $O_1$  or  $O_2$ , depending on the selected track of the memory switch which stands near  $E$ . If the locomotive enters through  $U$ , the application of the given definitions shows that the selected track at the switches near  $E$  and  $U$  are both changed: the switch at  $U$  is a flip-flop which is changed by the very active passage of the locomotive and the switch at  $E$  is a memory one which is changed because the locomotive is sent by the track imposed by  $U$  on a way which make it passively cross the switch through its non-selected track. The just described actions of the locomotive correspond to a **read** and a **write** operation on the bit contained by the circuit which consists of the configurations of the switches at  $E$  and at  $U$ . It is assumed that the write operation is triggered when we know that we have to change this very bit.

From this element, it is easy to devise circuits which represent different parts of a register machine. As an example, Figure 3 illustrates an implementation of a unit of a register.

As indicated by its name, the **fixed switch** is left unchanged by the passage

of the locomotive. It always remains in the same position: when actively crossed by the locomotive, the switch always sends it onto the same track. The flip-flop switch is assumed to be crossed actively only. Now, after each crossing by the locomotive, it changes the selected track. The memory switch can be crossed by the locomotive actively and passively. In an active passage, the locomotive is sent onto the selected track. But the selected track is defined by the track of the last passive crossing by the locomotive. Of course, at initial time, the selected track is fixed.

Other parts of the needed circuitry are described in [5, 2]. The main idea in these different parts is to organize the circuit in possibly visiting several elementary circuits which represent the bits of a configuration which allow the whole system to remember the last visit of the locomotive. The use of this technique is needed for the following two operations.

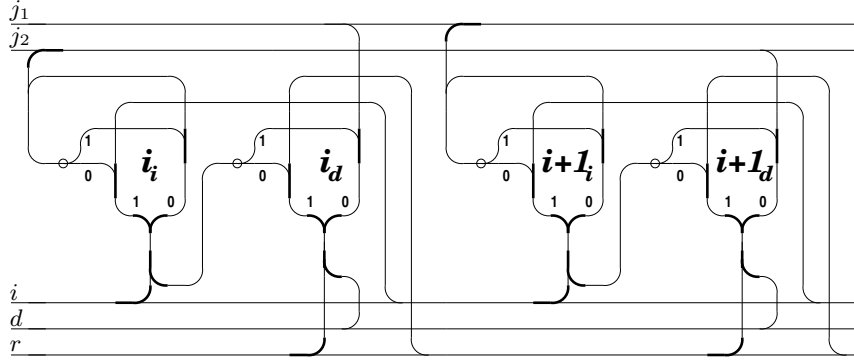


**Figure 3** Here, we have two consecutive units of a register. A register contains infinitely many copies of units. Note the tracks  $i$ ,  $d$ ,  $r$ ,  $j_1$  and  $j_2$ . For incrementing, the locomotive arrives at a unit through  $i$  and it leaves the unit through  $r$ . For decrementing, it arrives through  $d$  and it leaves also through  $r$  if decrementing the register was possible, otherwise, it leaves through  $j_1$  or  $j_2$ .

When the locomotive arrives to a register  $R$ , it arrives either to increment  $R$  or to decrement it. As can be seen on Figure 3, when the instruction is performed, the locomotive goes back from the register by the same track. Accordingly, we need somewhere to keep track of the fact whether the locomotive incremented  $R$  or it decremented  $R$ . This is one type of control. The other control comes from the fact that several instructions usually apply to the same register. Again, when the locomotive goes back from  $R$ , in general it goes back to perform a new instruction which depends on the one it has just performed on  $R$ . Again this can be controlled by what we called the **selector** in [5, 2].

At last, the dispatching of the locomotive on the right track for the next instruction is performed by the **sequencer**, a circuit whose main structure looks like its implementation in the classical models of cellular automata such as the game of life or the billiard ball model. The reader is referred to the already quoted papers for full details on the circuit. Remember that this implementation



is performed in the Euclidean plane, as clear from Figure 4 which illustrates the case of a few lines of a program of a register machine.

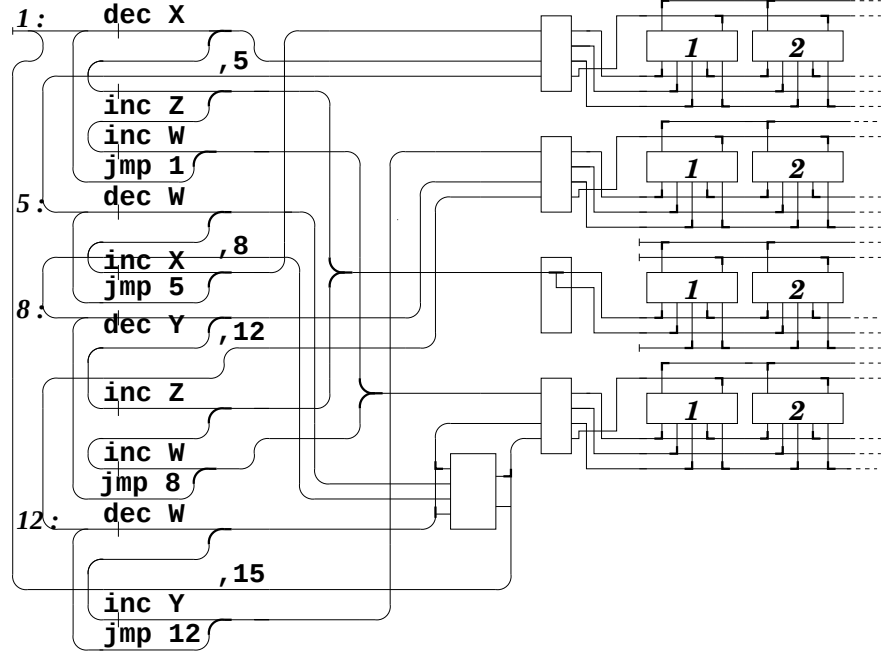

**Figure 4** An example of the implementation of a small program of a register machine. On the left-hand side of the figure, the part of the sequencer. It can be noticed how the tracks are attached to each instruction of the program. Note that there are four decrementing instructions for *W*: this is why a selector gathers the arriving tracks before sending the locomotive to the control of the register. On the way back, the locomotive is sent on the right track.

Now, we turn to the implementation in the hyperbolic plane, which first requires some features of hyperbolic geometry.

### 3 Reminder of hyperbolic geometry


In this section, we give the essential features needed by the reader to understand the implementation. Of course, a reader who is well informed on hyperbolic geometry may skip this section and go directly to Section 4.

#### 3.1 Hyperbolic geometry

Hyperbolic geometry appeared in the first half of the 19<sup>th</sup> century, in the last attempts to prove the famous parallel axiom of Euclid's *Elements* from the remaining ones. Independently, Lobachevsky and Bolyai discovered a new ge-

ometry by assuming that in the plane, from a point out of a given line, there are at least two lines which are parallel to the given line. Later, models of the new geometry were found, in particular Poincaré's model, which is the frame of all this study.

In this model, the hyperbolic plane is the set of points which lie in the open unit disc of the Euclidean plane whose border is the unit circle. The lines of the hyperbolic plane in Poincaré's disc model are either the trace of diametral lines or the trace of circles which are orthogonal to the unit circle, see Figure 5. We say that the considered lines or circles **support** the hyperbolic line, simply **line** for short, when there is no ambiguity, *h-line* when it is needed to avoid it. Figure 5 illustrates the notion of **parallel** and **non-secant** lines in this setting. In the model, parallels are characterized by the fact that they share a common point on the border of the disc: this common point does not belong to the hyperbolic plane and is called a **point at infinity**.

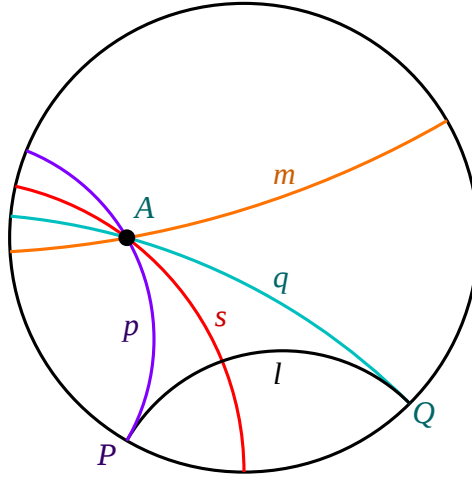


**Figure 5** The lines  $p$  and  $q$  are **parallel** to the line  $\ell$ , with points at infinity  $P$  and  $Q$ , on the border of the unit disc. The  $h$ -line  $m$  is **non-secant** with  $\ell$ : it can be seen that there are infinitely many such lines.

The angle between two  $h$ -lines are defined as the Euclidean angle between the tangents to their support. The reason for choosing the Poincaré's model is that hyperbolic angles between  $h$ -lines are, in a natural way, the Euclidean angle between the corresponding supports. In particular, orthogonal circles support perpendicular  $h$ -lines.

### 3.2 Tilings in hyperbolic geometry

In this paper, we shall not give a general definition of a tiling. We shall simply deal with a very special kind of tilings which is called a **tessellation**. Tessellations are themselves a particular member of the family of **finitely generated** tilings. This means that we have a finite set of closed bounded subsets of the plane, called the **prototiles** and that we can define a sequence of **copies** of prototiles, the **tiles**, in such a way that the union of the tiles cover the whole plane and that the interior of two copies neither intersect. By **copy** of a prototile, we mean an isometric image, where a set of admissible isometries has been fixed in advance. In a tessellation, there is a single prototile which is a polygon and it is required that the copies are obtained from the prototile by reflection in its sides and, recursively, by reflection of the images in their sides.

From a famous theorem established by Poincaré in the late 19<sup>th</sup> century, it is known that there are infinitely many tilings in the hyperbolic plane, each one being a tessellation based on a regular polygon  $P$ . It is enough that the number  $p$  of sides of  $P$  and the number  $q$  of copies of  $P$  which can be put around a point  $A$  and exactly covering a neighbourhood of  $A$  without overlapping satisfy the relation:  $\frac{1}{p} + \frac{1}{q} < \frac{1}{2}$ . The numbers  $p$  and  $q$  characterize the tiling which is denoted  $\{p, q\}$  and the condition says that the considered polygons live in the hyperbolic plane. Note that the three tilings of the Euclidean plane which can be defined up to similarities can be characterized by the relation obtained by replacing  $<$  with  $=$  in the above expression. We get, in this way,  $\{4, 4\}$  for the square,  $\{3, 6\}$  for the equilateral triangle and  $\{6, 3\}$  for the regular hexagon.

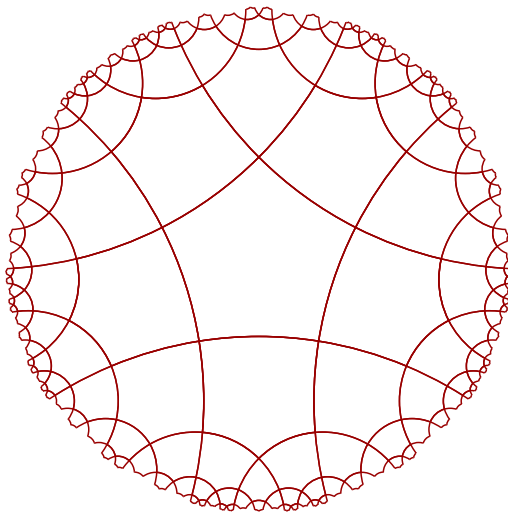

**Figure 6** *An illustration of the pentagrid.*


In the paper, we shall focus our attention on a single of these tilings, the

simplest one with a polygon with right angles: the tiling  $\{5, 4\}$  which is called the **pentagrid**, see Figure 6.

Even in the small size of Figure 6 it is not that easy to distinguish each tile of the tiling. This requires **navigation tools** which we sketchily present in Subsection 3.4.

### 3.3 The dodecagrid

Now, we turn to the case of the hyperbolic  $3D$  space. Poincaré's theorem tells us that there are infinitely many tessellations in the hyperbolic plane. Geometers of the early 20<sup>th</sup> century, see [14] established that there are only four tessellations in the hyperbolic  $3D$  space. We shall deal with one of them, which I call the **dodecagrid** which is based on Poincaré's dodecahedron: it is the dodecahedron which is obtained by assembling twelve regular pentagons with right angles in a spatial closed figure, see 7.

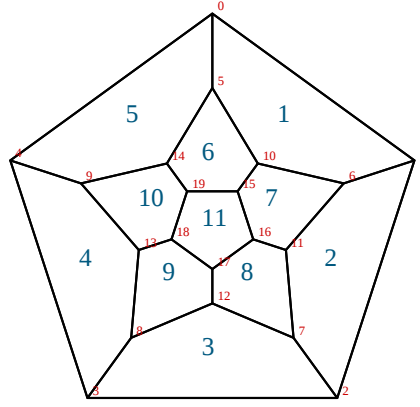

**Figure 7** A dodecahedron. The faces are numbered from 0 to 11 and the vertices are numbered from 0 to 19. Number 0 is not displayed for the corresponding face: Face 0 is defined by vertices 0 up to 5.

It can be proved that Poincaré's dodecahedron generates a tessellation of the hyperbolic  $3D$  space which is denoted by  $\{5, 3, 4\}$  and which is called the **dodecagrid**. In  $\{p, q, r\}$ ,  $p$  indicates the number of sides of a face,  $q$  denotes how many faces share a common point and  $r$  says how many polyhedra share a common side. Note that there is another regular dodecahedron in the hyperbolic  $3D$  space which is called the **big dodecahedron** as it is bigger than Poincaré's one. It is based on another regular pentagon making a smaller dihedral angle. The big dodecahedron also generates a tessellation of the hyperbolic  $3D$  space which is denoted by  $\{5, 3, 5\}$ . Accordingly, we can see that in the tessellation generated by the big dodecahedron, there are five dodecahedra around an edge instead of 4 of them in the dodecagrid.

Figure 7 illustrates one dodecahedron. The numbering of the faces is a

convention which we shall follow through out the paper. Figure 7 makes use of a central projection. We can imagine that the centre of the projection is a point which is on the axis of symmetry which is orthogonal to face 11 and which crosses both faces 11 and 0. We can imagine that this centre is outside the dodecahedron and above face 11, considering that face 0 is below face 11. The projection is done onto the plane of face 0. This representation is called a **Schlegel diagram** after the name of the geometer of the 19<sup>th</sup> who devised it in his study of various tessellations, including spatial ones.


The representation of the dodecagrid is not an easy problem. In [11] I have shown how to use Schlegel diagrams in order to represent the dodecagrid itself inside a single dodecahedron. As we shall not use this representation in this paper and we refer the reader to [11, 8] for more details on this topic.

We conclude this subsection by mentioning that in higher hyperbolic dimensions, the problem almost vanishes. There are five tessellations in the hyperbolic  $4D$  space. One of them is thoroughly studied in [4, 8]. However, starting from dimension 5, there are no more tessellations in hyperbolic spaces, again see [14].

### 3.4 Navigation in the pentagrid and in the dodecagrid

Now, we turn to the question of locating tiles in the tessellations we shall use in this paper: the pentagrid and the dodecagrid. This is the key point in order to navigate in these spaces.

The navigation in a tiling of the hyperbolic space can be compared to the flight of a plane with instruments only. Indeed, we are in the same situation as a pilot in this image as long as the representation of hyperbolic spaces in the Euclidean ones entail such a distortion that only a very limited part of the hyperbolic space is actually visible.

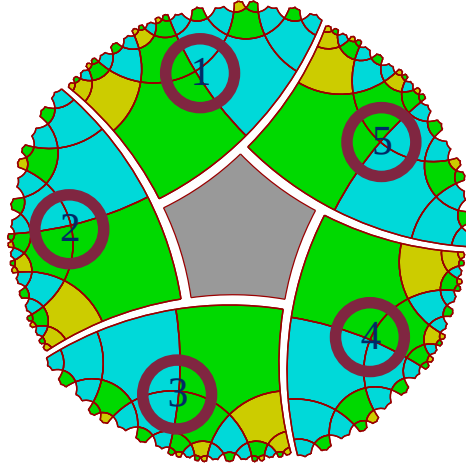

**Figure 8** *The central tile and the five quarters around it, splitting exactly the hyperbolic plane.*


However, tools can be used which make this very limited visibility still useful, constituting a true *GPS* allowing to navigate in these spaces.

The principle of the navigation algorithms rely on three ideas which can be applied in many tilings, see [8] which we illustrate on the pentagrid by Figures 8, 9 and 10.

For what is the pentagrid, we first split the hyperbolic plane into six regions: a central tile and five **quarters** which are dispatched around the central tile as illustrated by Figure 8. The figure also indicates a numbering of the quarters which we shall use in the remaining sections of the paper.

Then, we split each quarter as indicated in Figure 9. The recursive structure of this splitting defines a tree which spans the tiling. The third idea consists in numbering the nodes of the tree level after level and, remarking that the number of nodes on the level  $n$  is  $f_{2n+1}$  defined by the Fibonacci sequence where  $f_0 = f_1 = 1$ , to represent the numbers in the numbering basis defined by this sequence. Also, as the representation is not unique, we fix it by choosing the longest one.


On Figure 9, we can notice that the Fibonacci tree has two kinds of nodes: the **white** ones, which have three sons, and the black ones, which have two sons. In both cases, the leftmost son is black, the others are white. Figure 10 represents the tree in a more traditional way together with the numbering of the nodes and their representation in the Fibonacci basis. Later on, we shall call **coordinate** this representation of the number of a node.

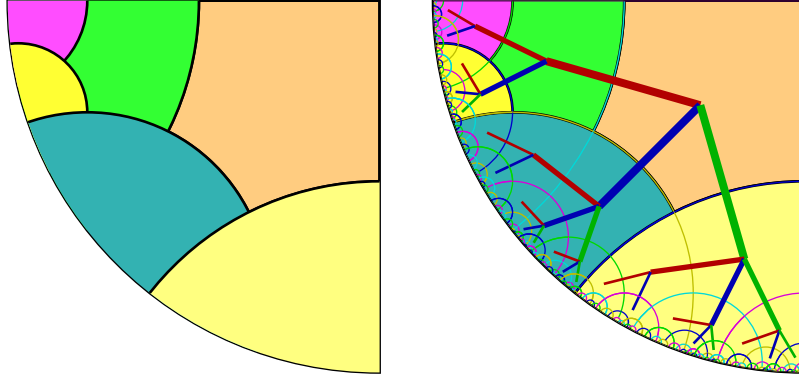

**Figure 9** *Second part of the splitting: splitting a sector, here a quarter of the hyperbolic plane. On the left-hand side: the first two steps of the splitting. On the right-hand side: expliciting the tree which spans a sector.*


There are important properties which are illustrated by Figure 10 and which I called the **preferred son properties**. It consists in the fact that for each node of a Fibonacci tree, among the coordinates of its sons, there is exactly one of them which is obtained from the coordinate of the node by appending two 0's and which is called the preferred son. Moreover, the place of the preferred son is always the same among the sons of a node: the leftmost son for a black

node, the second one for a white node.

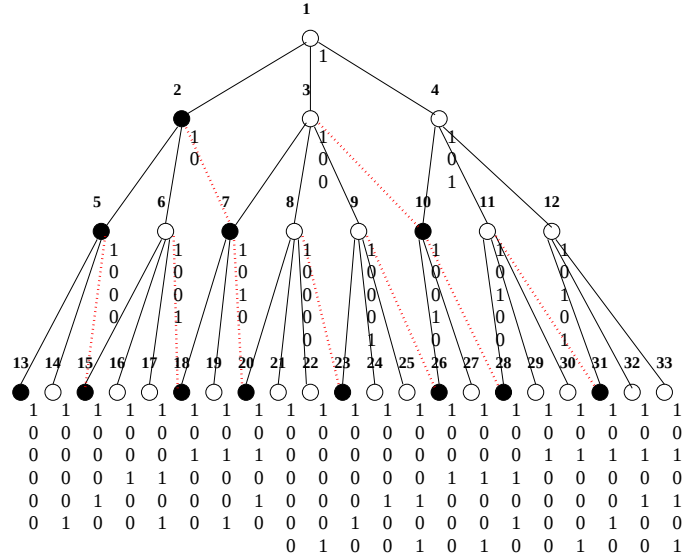

**Figure 10** *The Fibonacci tree: the representation of the numbers of the nodes in the Fibonacci basis.*

From the preferred son properties, it was possible to devise an algorithm which computes the path from the root to a node in a linear time in the length of the coordinate of the node, see [3]. From this, we also get that the coordinates of the neighbours of a given tile can be computed from the coordinate of the tile in linear time too.

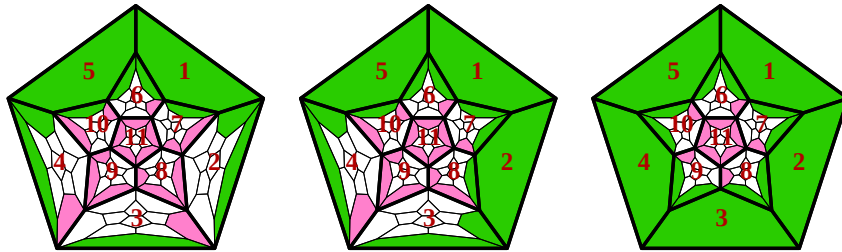


**Figure 11** *Splitting a corner of the dodecagrid. On the left-hand side, the splitting of a corner. On the middle, the splitting of a half-octant. On the right-hand side, the splitting of a tunnel. Note that the faces are numbered according to the convention introduced in Figure 7.*

The same ideas can be used to define navigation tools for the dodecagrid. Using Schlegel diagrams, we can also define a splitting of the hyperbolic  $3D$  space, this time into 8 corners around a point which is a common vertex. Next, we

split the corner as indicated in Figure 11.

The idea of the representation is, as in the pentagrid, to fix rules which allow to get a bijection of a tree with the tiling restricted to the corner. If we allow the reflection of any dodecahedron of the tiling in its faces, we shall get many doubled replications as explained in Figure 12.



**Figure 12** *Why we can see the necessity of inhibition rules prohibiting each second reflection producing an already produced dodecahedron.*

Look at faces 10 and 6. Consider the bisector plane of the edge  $e$  shared by both those faces. In this plane, the trace of the faces defines two lines which intersect at right angles on the projection of  $e$ . The reflection of the dodecahedron in faces 6 and 10 produce two dodecahedra  $D_6$  and  $D_{10}$ . Let  $A$  be the face  $D_6$  which is in contact with  $e$  and let  $B$  be that of  $D_{10}$  which is also in contact with  $e$ , see Figure 12. We know that around  $e$  there are exactly four dodecahedra in the tiling. We have already three of them with our initial dodecahedron,  $D_6$  and  $D_{10}$ . The last one can be obtained either by the reflection of  $D_6$  in  $A$  or by the reflection of  $D_{10}$  in  $B$ . In order to get a bijection, one reflection must be ruled out and the other permitted. This is the reason of the coloured faces in Figure 11. The reflection of a dodecahedron is forbidden in a coloured faces. It is mandatory in a white face.


The tree which we obtain has not the nice properties of his cousin of the pentagrid. But still, it allows to obtain a system of coordinates which works in polynomial time, in fact in cubic time at most.

We refer the reader to [8]. However, the splitting suggested by Figure 11 is a bit different from that indicated in [8]. The difference is that the splitting of Figure 11 is more symmetric and it involves three basic regions instead of four ones in the splitting of [8].

In the paper, we shall not directly use the tree. Taking into account that most of the circuitry will occur in a plane, we shall use projections onto that plane. Now, we can chose as plane of projection, the plane of a face of a fixed dodecahedron. We obtain that the restriction of the dodecagrid to this plane is



a copy of the pentagrid. And so, for the projections we have in mind, we can use the pentagrid.

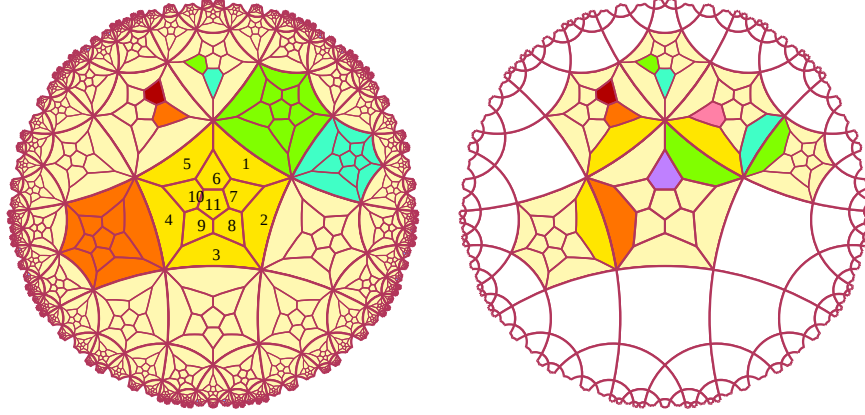

**Figure 13** *Two different ways for representing a pseudo-projection on the pentagrid. On the left-hand side: the tiles have their colour. On the right-hand side: the colour of a tile is reflected by its neighbours only.*

Fix a plane  $\Pi_0$  of the dodecagrid which supports one face of a dodecahedron. We know that the trace of the dodecagrid on this plane is a copy of the pentagrid. We each tile of the pentagrid is a face of exactly one tile of the dodecagrid over  $\Pi_0$ . We draw a Schlegel diagram of the corresponding dodecahedron within its face which lies on  $\Pi_0$ . We shall call this a **pseudo-projection onto  $\Pi_0$** . Imagine that we have four tiles  $O$ ,  $Y$ ,  $G$  and  $B$  defined by their respective colour, orange, yellow, green and blue. Imagine that another tile  $W$ , a white one, sees  $Y$  through its face 1, the same face being numbered 5 in  $Y$ , the face 1 of  $Y$  being that which is shared with  $G$ . Then, we can see two other tiles on  $W$ , a red one and an orange one, on faces 10 and 6 respectively.

On the left-hand side of Figure 13, the tiles keep their colour.

We can see that this raises a problem with the tiles which are put on the faces 6 and 10 of the tile  $W$ , in case  $W$  would be blue, for instance. For: what colour should be that of face 6? The colour of  $W$  or the colour of the other dodecahedron which shares it with  $W$ ? Another problem is given, for instance by the faces 1 of  $Y$  and  $G$ , assuming that the face 1 of  $G$  is that which sees  $Y$ . In fact, as can easily be seen by the fact that these faces are both perpendicular to  $\Pi_0$  and that they share a common edge lying in  $\Pi_0$ , these faces coincide. The fact that they have different colour is a bit misleading.

In order to fix a choice allowing us to keep as much information as possible in the pseudo-projection, we shall consider that a face of tile does not show the colour of the tile but the colour of its neighbour sharing the same face. The right-hand side of Figure 13 shows the same configuration as the one of the left-hand side, but under the new convention. Also, to make the figure more readable, we do not draw the pseudo-projection of a tile who would be

white with only white neighbours among those of its neighbours which do not touch  $\Pi_0$ . Now we can see that we can use the fact that two different faces coincide in the 3D space by indicating the colour of the other tile.

Later on, we shall adopt this second solution to represent our cellular automaton. Indeed, the cells of the cellular automaton are the dodecahedra of the dodecagrid and the colour of a tile is given by the state of the cellular automaton at the considered dodecahedron.

Before turning to the next section, we have an important remark.

We have already indicated that, in the pseudo-projection, faces which share an edge but which belong to different dodecahedra do coincide in the hyperbolic 3D space. The consequences are important with respect to the neighbours of a tile  $\tau$  where, by neighbour, we mean a polyhedron which shares a face with  $\tau$ . On the left-hand side part of Figure 13, we can see four small faces coloured with  $r$ ,  $o$ ,  $g$  and  $b$  on two white dodecahedra which we call  $W_1$  and  $W_2$ , with  $W_1$  being a neighbour of the central cell and  $W_2$  a neighbour of the green neighbour of the central cell. We can view these coloured faces as dodecahedra obtained from the dodecahedron to which the face belongs by reflection in the very face. Call these dodecahedra by the colour of their defining faces. Considering the planes of the faces and their relations with  $\Pi_0$ , it is not difficult to see that the dodecahedra  $r$  and  $g$  are neighbours as well as the dodecahedra  $o$  and  $b$ . However, despite the fact that the corresponding faces share an edge, the dodecahedra  $r$  and  $o$  are not neighbours. However,  $r$ ,  $o$  and  $W_1$  share a common edge: this means that there is a fourth dodecahedron  $\delta$  sharing this edge which is not represented in the figure. Now,  $\delta_1$  plays an important role for both  $r$  and  $o$  as it is a neighbour for both of them. The same remark holds for the dodecahedra  $g$  and  $b$  for which there is a dodecahedron  $\delta_2$ , a neighbour of both dodecahedra, sharing a common edge also with  $W_2$ . Moreover, it can be seen that  $\delta_1$  and  $\delta_2$  are also neighbours: their common face is in the plane of the common face of  $W_1$  and  $W_2$ , which also contains the common face of  $r$  and  $g$  as well as the common face of  $o$  and  $b$ .

Both couples  $r$  with  $g$  and  $o$  with  $b$  can also be seen on the right-hand side part of Figure 13. There are also two other coloured small faces: a purple one on the central tile, call it  $p$  as well as the dodecahedron which it defines. There is also a pink one on the green dodecahedron which is a neighbour of the central one. Call the pink dodecahedron  $\pi$ . It is not difficult to see that the following pairs of dodecahedra are neighbours in the dodecagrid:  $b$  and  $\pi$ ,  $\pi$  and  $p$  as well as  $p$  and  $o$ . Moreover, the four dodecahedra  $o$ ,  $b$ ,  $\pi$  and  $p$  share a common edge which belongs to the same line as the one which supports the edge shared by  $W_1$ ,  $W_2$ , the central tile and  $G$ .

At last, remark that the plane of a face of a dodecahedron  $D$  defines two half-spaces: the half-space which does not contain  $D$  contains one neighbour of  $D$  exactly. The half-space which contains  $D$  contains all the other neighbours of  $D$  also. This can be seen as a consequence of the convexity of the dodecahedron.

Now, we can turn to the implementation of the railway model in the dodecagrid.

## 4 Implementation of the tracks

The implementation of the model is much more difficult in the hyperbolic  $3D$ -space than in the hyperbolic plane. Speaking about implementations in the hyperbolic plane, I often use the metaphor of a pilot flying with instruments only. This can be reinforced in the case of the hyperbolic  $3D$ -space by saying that this time we are in the situation of an astronaut who can do no other thing than fly with instruments only: sometimes, the astronaut may look at the earth. It is a fantastic image, however of no help for the navigation in cosmos. For the dodecagrid, we hope that the method explained in Subsection 3.4 shows that the situation is after all a bit better than in cosmos. The figures which we can obtain from the projections defined in Subsection 3.4 may help the reader to have a satisfactory view of the situation. We have to never forget that the views we can obtain are dramatically simplified images of what actually happens. However, always bearing in mind that the images are always a local view, a good training based on rigorous principles may transform then into an efficient tool.

Remember that in most its parts, the track followed by the locomotive runs on a fixed plane  $\Pi_0$  of the hyperbolic  $3D$  space. Only occasionally, it switches to other planes, perpendicular to  $\Pi_0$ . In particular, this is the case for the implementation of crossings: as in [7], we take advantage of the third dimension in order to replace them by bridges. For the sensors too, we shall take benefit of the third dimension to differentiate the configurations of the various switches.


In this section, we deal with the tracks only, postponing the implementation of the switches to Section 5.

### 4.1 The pieces

Below, Figure 14 illustrates a copy of the most common element of the tracks. Later on, we call this element the **straight** one. This element consists of a single dodecahedron, the track itself, marked by four blue dodecahedra, the **milestones**, which are neighbours of this dodecahedron.

Note the numbering of the faces on the Figure: it follows the convention introduced in Subsection 3.4. In Figure 14, pictures (a) and (b), face 0 is not visible but it is visible in the other pictures. Similarly, face 5 and face 2 respectively, are not visible in pictures (c) with (d) and (e) with (f) respectively. Usually, this not visible face will be called the face of the plane of the element or its **back**, as we did in [4, 8], or also its **bottom**. Now, due to the role of the elements in the circuit, we shall say that face 1 is the **entry** of the element and that faces 3 and 4 are its **exits** in the case of pictures (a) and (b). In the case of pictures (c) with (d) and (e) with (f) respectively, the entries are face 4 with face 10 and face 3 with face 8 respectively. We shall say **exit 3**, **exit 4**, **exit 8** or **exit 10** if we need to make it more accurate. It is important to notice that exits and entries can be exchanged: we can have exit 1 and entry 3 but not exit 3 and entry 4. Such a change of direction is necessary, but it will be realized by another element. As the role of entry and exits can be exchanged, we shall use the word **exit** in general descriptions with the possible meaning of

both an entry or an exit through the possibly indicated face.

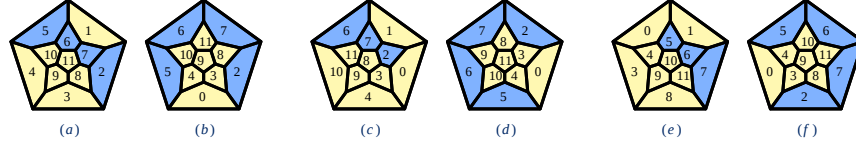


**Figure 14** An ordinary element of the track. Figure (a) is a view from above. Figure (b) is a view from the back of face 1. The locomotive enters the element via face 1 and exits via face 3 or face 4. It also may enter via face 3 or face 4 and then it exits through face 1.

In Figures (c) and (d), the element is a bit turned around face 1 and the exits are now face (4) and (10). In Figures (e) and (f), the element is turned around face (1) too, but in the opposite direction, and the exits are now faces 3 and 8.

The motion in the opposite direction is always possible.

Remember the convention we introduced in Subsection 3.4. If not otherwise mentioned, the face  $F$  of a cell has the colour of the state of the neighbour of the cell sharing  $F$  with it. Accordingly, in most figures of the paper, the colour of a cell can be deduced from the colours of the face of its neighbours. As an example, in the pictures of Figure 14, the milestones are blue and they are neighbours of the element.

As the name suggests, the milestones are usually fixed elements: they are not changed by the passage of the locomotive. This means that the milestones always remain blue, while the track is white as most cells of the space itself: the white state plays the role of the quiescent state: if a cell is white as well as all its neighbours, then it remains white.

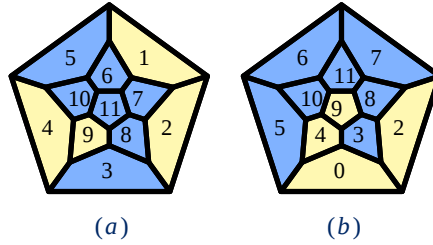

**Figure 15** The corner element of the track. Figure (a) is a view from above. Figure (b) is a view from the back of face 1. The locomotive enters the element via face 1 and exits via face 2. It also may enter via face 2 and then it exits through face 1.

In Figure 14, the pictures represent various positions of the same elements which can be obtained from each other by a rotation a face of the dodecahedron or by a product of such rotations. We refer the reader to Subsection 6.1 where this problem is examined. In the figure, pictures (a) and (b) show a situation where the plane of the railways is that of face 0. In the pictures (c) and (d), the plane is that of face 5. In the pictures (e) and (f), it is that of face 2. The milestones can be viewed as the materialization of a catenary over the track

itself, assumed to be put on the plane of the element.


Figure 15 illustrates another element of the track which we call a **corner**. This element allows the locomotive to perform a turn at a right angle. This possibility is very important and absolutely needed, as we shall see later.

As we can see from Figure 15, the corner has more milestones around it than a straight element: 7 milestones instead of 4 ones. However, the back of a corner is white, while that of a straight element is usually blue.

## 4.2 Vertical segments

When finitely many straight elements are put one after each other, with the entry of one of them shared by the exit of the previous one, we say that these elements are set into a **vertical segment**, **vertical** for short, provided that the plane of these elements is the same and that there is a line of this plane which supports one side of each element which we call the **guideline**. Figure 16 illustrates the basic example of a vertical. The guideline supports a side of the faces 0 of the elements and the common plane is that of the faces 5.

In the representation of Figure 16, the dodecahedra are projected on the plane of their back, face 5.

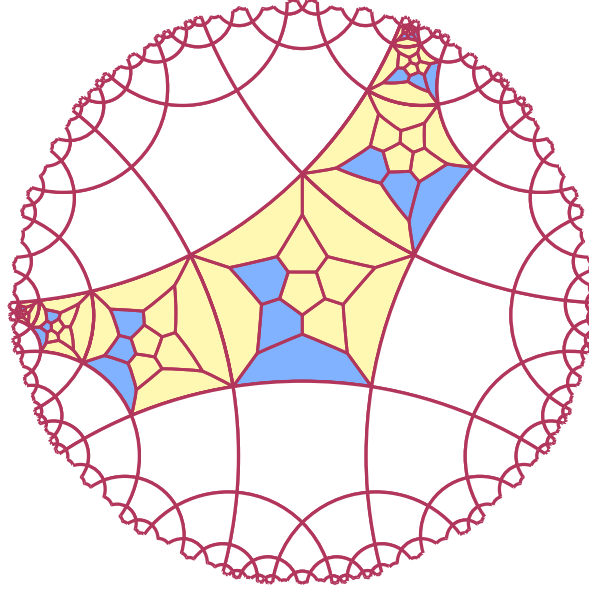

**Figure 16** *Pseudo-projection on the plane of the track of its elements in the case of a vertical segment.*


Number the elements of the figure from 1 to 7. We can see that the element  $i$  is in contact with the element  $i+1$  with  $i \in \{1..6\}$ . Consider elements 3 and 4, the latter one occupying the central pentagon of the figure. The exit 4 of element 4 and the entry 1 of element 3 appear as different faces of dodecahedra:

each one is projected inside the face 5 of the dodecahedron. Now, by definition, the entry 1 of element 3 and the exit 4 of the element 4 coincide. Indeed: elements 3 and 4 have their faces 5 on a common plane. They also have their sides 0 on the guideline. The entry 1 of element 3 and the exit 4 of element 4 are perpendicular to the guideline and they share a common side: they are the same face. As we stressed in Subsection 3.4, this situation is important and we shall not repeat this point systematically. It is a property of the hyperbolic 3D space which we have to bear in mind while looking at the figures.

Note that in the figure, the entry 1 of an element is connected with the exit 4 of the previous one. Of course, the segment can be run in the opposite direction: then an exit 4 becomes an entry 4 and an entry 1 becomes an exit 1.

### 4.3 Horizontal segments

In Figure 17, we represent another kind of track which we shall call **horizontal segments**. Such tracks consists of finitely many elements which can be written as a word of the form  $(SeC)^k$ , where  $Se$  denotes a straight element and  $C$  denotes a corner. The entry of the corner abuts an exit of the straight element. It is not always the same exit. In fact, there is an alternation of the exits which makes a Fibonacci word: if we associate to  $SeC$  the number of the exit of the straight element which abuts the entry of the corner, then this defines a homomorphism

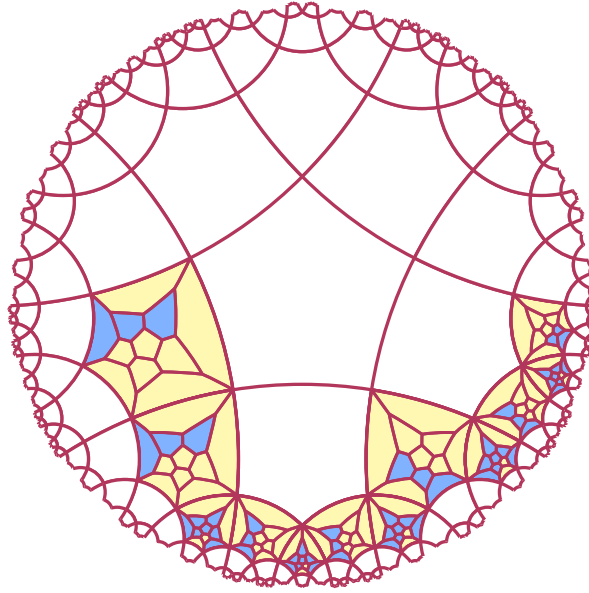

**Figure 17** *Pseudo-projection on the plane of the track of its elements in the case of a vertical segment.*

of  $(SeC)^k$  on a factor of length  $k$  of the infinite Fibonacci word. Indeed, all corners are put on a black node of the Fibonacci tree. Straight elements are

put on either white or black nodes. This can be made more accurate as follows. The straight elements of the segment are in contact of cells of the level  $n$  of the tree while the straight elements themselves are in the level  $n+1$ . The corners of the segment are all in the level  $n+2$ . Now, when the straight element is put on a white node, the exits are through faces 1 and 4. When it is put on a black node, the exits are through faces 1 and 10. This explains the connection of a horizontal segment with the infinite Fibonacci word, also see [6].

In Figure 17, all the cells, the leftmost one excepted, constitute an illustration of a horizontal segment. Note that the leftmost element does not belong to the horizontal segment but it realizes the connection with a vertical segment.

#### 4.4 Bridges


As already mentioned in this section, crossings of the planar railway circuit are replaced by bridges. We can arrange the crossing in such a way that two vertical segments  $V_0$  and  $V_1$  cross each other. Assume that  $V_0$  will remain in the plane  $\Pi_0$  of its faces 5 while  $V_1$  will make a detour in the plane  $\Pi_1$ , perpendicular to  $\Pi_0$ , which contains the guideline of its projection onto  $\Pi_0$ . In  $\Pi_1$  the track will follow a horizontal segment which will take the cells of two circles of cells in  $\Pi_1$ : at a distance 2 or 3 from the cell  $c_0$  of  $V_0$  which has a contact with both  $\Pi_0$  and  $\Pi_1$ . Figure 18 represent such a bridge using two pseudo-projections: one onto the plane  $\Pi_0$ , on the left-hand side of the figure, and onto the plane  $\Pi_1$  on its right-hand side. We shall say that the projection onto the plane  $\Pi_0$  is the view from above and that the projection onto the pane  $\Pi_1$  is the frontal view, both ways of views referring to the bridge itself.

Let us have a closer look at the figures.

In the view from above, we can see two vertical segments: one goes from the right-up part of the figure to the left-bottom one. It can be easily recognized as a copy of the vertical segment illustrated by Figure 16. Here, it contains two tiles coloured with light brown. We shall call this track the top-down track. The other track goes from the left-upper part of the figure and goes to the right-bottom one. We shall call it the left-right track. We can see the guideline of the top-down track. It is the intersection of the planes  $\Pi_0$  and  $\Pi_1$ .

Still in the view from above, we can see golden yellow marks on the light brown tiles and two green marks on the central tile. The golden marks indicate that the top-down track goes on these tiles. The green marks indicate the two piles of the bridge. Number the cells of the projection of the top-down track in the view from above from 1 to 7, 1 being the number of the topmost cell. Cell 4 is the central cell and it belongs to the left-right track: the top-down track follows a horizontal segment on the plane  $\Pi_1$  which can be seen in the frontal view, see the right-hand side part of Figure 18. The departure/arrival of the horizontal segment is defined by cells 6 and 2 which can be seen on both views. In the frontal view, the trace of the plane  $\Pi_0$  can easily be seen: it is the border between the coloured tiles and the others which remain blank, on the bottom part of the figure. There are seven coloured cells along this line in the frontal view: they are exactly the cells number from 1 to 7 in the view from

above. In the frontal view, cell 6 is on the left-hand side.

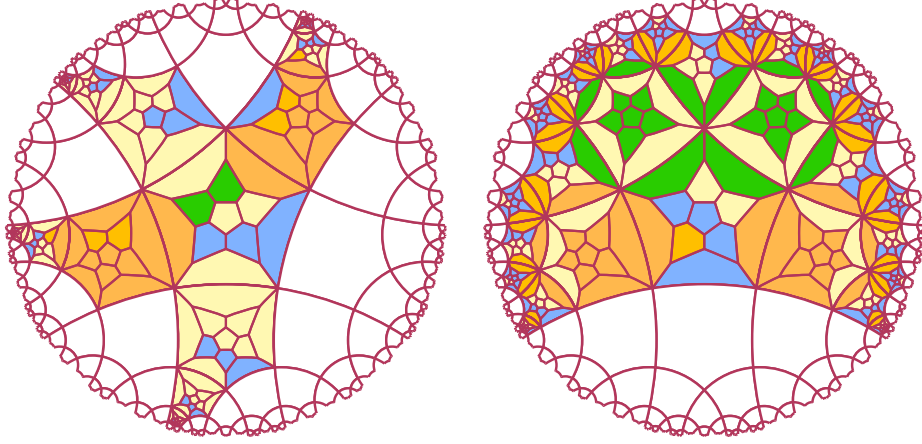

**Figure 18** *Pseudo-projections of two tracks crossing through a bridge. On the left-hand side: pseudo-projection on the plane  $\Pi_0$ ; on the right-hand side: pseudo-projection on the plane  $\Pi_1$ . The exit faces are marked by a golden yellow colour on the right-hand side figure. The piles of the bridge are marked with green on the central cell. In the frontal view, we have exceptionally given the colour of the cell to its faces, in fact its faces which are not in contact with a cell of a track. This is to underline the elements of the bridge on which the track relies.*

Cells 6 and 2 are an application of what we have mentioned in Subsection 4.1, about the different ways to rotate a straight element in order to access to another plane. Cell 6 is alike the picture (c) of Figure 14. Its faces 0 and 5 are in contact with the guideline. Now, exit 3 may be used to go into the plane of face 0 which is perpendicular to the plane of face 5. This will be the starting point of our bridge. Note that face 0 of cell 6 is on the plane  $\Pi_1$ . From this tile, the bridge follows a horizontal segment until it arrives at cell 2 which is in contact with both  $\Pi_0$  and  $\Pi_1$ . Notice that cell 2 is alike the picture (e) of Figure 14, and that its face 4 is the face where the track of the bridges again joins the top-down track. Note that in cell 2, face 0 is on the plane  $\Pi_1$  as this is the case for cell 6. Looking at the cells of the horizontal segment in the frontal view, we can notice that the straight elements have a milestone which is below the plane  $\Pi_1$ : this means that there are milestones on both half-spaces defined by the plane  $\Pi_1$ . Now, for the corners, all the milestones are in a same half-space defined by the plane  $\Pi_1$ . For the straight elements, their exits are most often the faces 1 and 4. However, from time to time, the exits are the faces 1 and 10. In Subsection 4.3 we have seen the reason of these variants. As can be seen on the frontal view, all corners are put on a black node of the Fibonacci tree and straight elements can be either on a black node or on a white one. From Subsection 4.3, we know that when a straight element is on a white tile, the exits are the faces 1 and 4. When it is on a black tile, it is the faces 1 and 10.



## 4.5 The motion of the locomotive on the tracks

Presently, we describe the motion of the locomotive on its tracks.


This motion is very different from the simulation of [7]. There, the track were materialized by a specific colour and the locomotive simply occupied two contiguous cells of the track. Here, as this is the case in the planar simulation described in [10], the set of cells occupied at some time by the locomotive consists of blank cells. They belong to the track because they are marked in a specific way by the milestones. However, outside this particular point, the motion of the locomotive is the same as in the previous simulations explained in [9, 13, 12, 10]. If we restrict our attention to the cells of the track, we have the following one-dimensional rules for the motion of the locomotive:

$$\begin{array}{ll}
 B W W \rightarrow B & W W B \rightarrow B \\
 R B W \rightarrow R & W B R \rightarrow R \\
 W R B \rightarrow W & B R W \rightarrow W \\
 W W R \rightarrow W & R W W \rightarrow W
 \end{array}$$

As can easily be deduced from the rules, the locomotive consists of two contiguous cells: one is blue, the front, the other is red, the rear.

With the just mentioned principles in mind, we can easily device the rules for the motion of the locomotive. We postpone the systematic writing of the rules to Section 6.


Figures 19 and 20 illustrate the application of the rules deduced from the one-dimensional rules which we have mentioned above. In these representations and the one we shall use for the switches in Section 5, we do not represent the colour of the state of the cell, as already mentioned in Section 4. We shall use the convention which we introduced there according to which, a face  $F$  of a cell  $C$  represents the state of the neighbour sharing  $F$  with  $C$ . As in our pseudo-projection the same face is represented twice as it is shared by two cells, each face represents the colour of the other cell. This way allows us to also materialize the motion of the locomotive as can be seen in Figures 19 and 20, as well as in a part of the figures of Section 5.

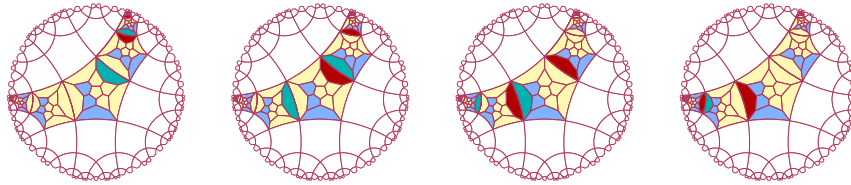

**Figure 19** *Sequence of pseudo-projections on the plane of the track in the case of a vertical segment when the locomotive runs over it.*

It can be noticed that the elements can be freely assembled, provided that they observe the principle which we have fixed: exits of an element are 1 and 2 for corners, they are 1 and 3, 1 and 4, 1 and 8 or 1 and 10 for a straight element.

Other combinations are ruled out by the rules, we shall come back to this point in Subsection 6.

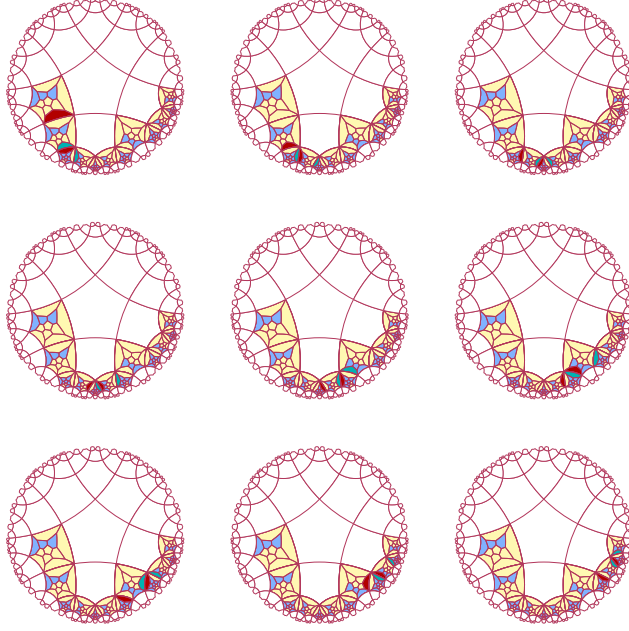

**Figure 20** *Sequence of pseudo-projections on the plane of the track in the case of a horizontal segment when the locomotive runs over it.*

## 5 Implementation of the switches

In order to describe the switches, we shall focus on the memory switch which has the most complex mechanism among the switches. In fact, this mechanism consists of two connected parts  $A$  and  $B$ . Notice from now on that the fixed switch will use the mechanism  $A$  alone and that the flip-flop switch will use the mechanism  $B$  alone.

All switches will share the following common features. They are assumed to be on the same plane  $\Pi_0$ . However, certain parts of the above mechanisms are on both half-spaces defined by  $\Pi_0$ . This is why we shall present two figures for each switch: one is a pseudo-projection from above onto  $\Pi_0$ , the other is a pseudo-projection onto the same plane, from below. We have to remember that in such a case, the left-hand side and the right-hand side are exchanged.

Next, for two of them, the switches have a left-hand side version and a right-hand side one. In the left-hand side, right-hand side version respectively, the active passage sends the locomotive to the left-hand side, right-hand side track respectively. However, for the fixed switch, a left-hand side version is enough. A right-hand side fixed switch is obtained from a left-hand side one as follows:

after the switch, the left-hand side track crosses the right-hand side one in order to exchange the directions. Thanks to the bridge which we have implemented, this is easily performed.

The switches will be presented according to a similar scheme.

First, we describe what we call the **idle configuration**: it is the situation of the switch when it is not visited by the locomotive. All switches are the meeting of three tracks. The meeting tile is a straight element and, in the figures, it is placed at the central tile. The track which arrives to the entry 1 of this element represents the arrival for an active crossing of the switch. Exit 3 gives access to the track which goes to the left and exit 4 gives access to the track going to the right. The cells of the tracks are numbered from 2 to 10 and from 12 to 15. Cells 2 to 5 constitute the arriving track. They follow a vertical segment which arrives to the leading tile of a quarter constructed around the central cell. We shall number this sector by 1, as the exit to which the track leads. Cell 2 is the farthest from the central cell, cell 5 is the leading tile of sector 1. The central cell is cell 6. Cells 7 to 10 constitute the track which leaves the switch through exit 3. They are displayed in a vertical segment included in a sector lead by cell 7 and which is called sector 3, after exit 3. Cells 12 to 15 constitute the vertical segment which leaves the switch through exit 4. These cells belong to sector 4 headed by cell 12.

The numbers come from the numbers of the cells given in the computer program which was used to check the correctness of the rules we shall describe in Section 6.


A closer look shows that the tracks are not exactly along a vertical: the cell which is in contact with an exit of the central cell, is a straight element whose face 0 is on the plane  $\Pi_0$ . The next cell, cell 4, 8 and 13 respectively is a corner, again with its face 0 on the plane  $\Pi_0$ . The remaining two cells constitute a vertical segment in the way we have defined them with a milestone below the plane  $\Pi_0$  with respect to the other milestone which consider as upon this plane.

With these conventions, we can start the study of each switch. We shall see the memory switches, the fixed switch and the flip-flop switches in this order.

## 5.1 Memory switches

As mentioned in the beginning of this section, the memory switches are the most complex construction in our implementation.

Figures 21 and 25 respectively represent the left-hand side, right-hand side memory switches respectively. In each figure, there is a big disc and a smaller one. The big disc is a pseudo-projection onto the plane  $\Pi_0$  from above, while the smaller one is a pseudo-projection onto the same plane from below. In the big disc, we apply the convention about the colour of the cells. We also do this for the small disc, except for the locomotive. Indeed, in the projection from below, the locomotive is hidden by the cell which is below its track. Accordingly, in order to locate the position of the locomotive, we imagine that the cells below its track are a bit transparent so that a pale hue of the colour is visible.

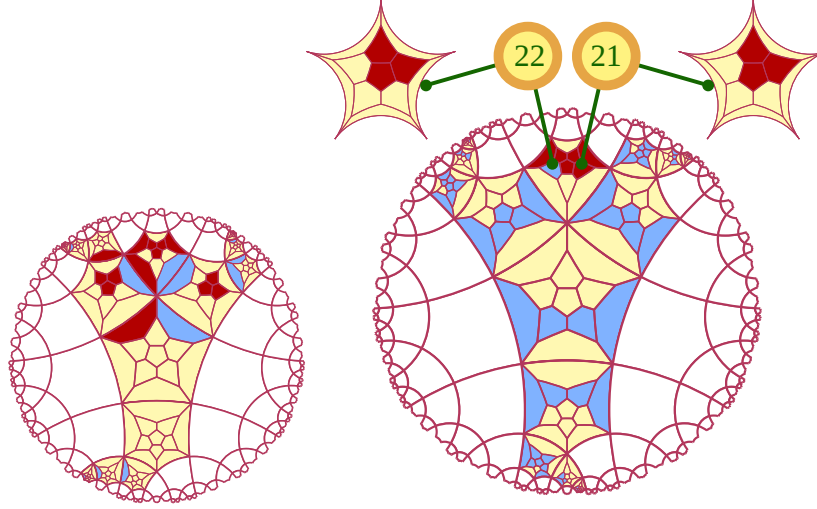

**Figure 21** *The idle configuration of a left-hand side memory switch, represented by the two pseudo-projections, one from above: the big disc; the other from below: the small disc.*


In the memory switch, there are two **sensors**, two **markers** and two **controllers**. The sensors are cells 17 and 18 which are neighbours of the cells 7 and 12 respectively through their faces 0. Cells 7 and 12 are called the **scanned cells**, inspected by their sensors. The **upper** controller is cell 20 which is the second common neighbour of cells 7 and 12 above the plane  $\Pi_0$ : the first common neighbour is the central cell. We consider that cell 20 has its face 0 on the plane  $\Pi_0$ . The **lower** controller is cell 19 which is the neighbour of cell 20 through its face 0: cell 19 is thus below the plane  $\Pi_0$  and we also consider that its face 0 is on the plane  $\Pi_0$ . The two markers are cells 21 and 22: they are neighbours of cell 20 through its faces 8 and 10 respectively. Now, the sensor of cell 7 is blue and that of cell 12 is red. Similarly, cell 21 is red and cell 22 is blue. The colours of the sensors and of the markers allow to identify the left-hand side memory switch. As easily seen in Figure 25, in a right-hand side memory switch, the colours of the sensors and the markers are exchanged: cells 21 and 18 are blue, cells 22 and 17 are red.

The working of the memory switch is the following.

A blue sensor is indifferent to the direction of the locomotive: it may cross the cell it scans in both ways. A red sensor does not behave the same. First, it prevents the locomotive to enter the cell it scans in an active passage. In a passive passage, it detects the passage of the locomotive, it allows it to pass through the cell it scans, but it reacts to the passage by changing its colour: as the blue sensor does not see the red one, the red sensor cannot change its colour to blue. It changes it to white. This is detected by the lower controller, usually blue, which becomes red. When the lower controller is red, both sensors change their colour: the blue one to red the now white one to blue. And the

lower controller goes back to blue. Now, the upper controller, usually blue, also detects the passive passage through the non-selected track: its markers allow it to differentiate cell 7 from cell 12. And so, when the front of the locomotive leaves cell 7 or cell 12 when this cell is on the non-selected track, the upper controller becomes white and then red. It becomes white to prevent the locomotive from being duplicated on the selected track: the locomotive must go through entry 1. Then it becomes red, at the same times as the lower controller becomes red. When the upper controller is red, both markers exchange their colour and at the next time, the upper controller returns to blue.

In the rest of this subsection, we show figures which we illustrate the crossing of a memory switch by the locomotive. Also, with each figure, we reproduce, as a table, a trace of the execution of the computer program which simulated the various motions. In a heading line, the trace indicates the visited cells by their number as well as their immediate neighbours, also numbered, when they may be changed during the visit. Below this leading line, for each time, the state of a cell is given in the column corresponding to its number. Looking at the numbers, we can see that the simulation program considered two more cells on the track arriving to the switch than what is shown by the figures. But the figures cannot show more.

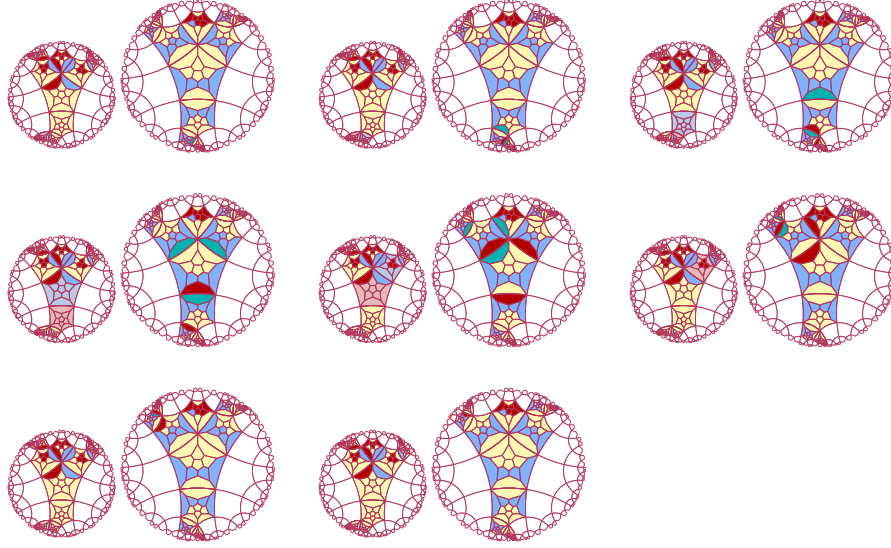

**Figure 22** *The active passage of the locomotive through a left-hand side memory switch.*

Figure 22 illustrates the motion of the locomotive during an active passage through a left-hand side memory switch and Table 1 gives the trace of the corresponding execution. Due to the symmetry of the projections onto  $\Pi_0$  used to establish the big and the small discs, it can be noticed that the locomotives


seem to go closer and closer from each other. Also, we can see that the blue and the red sensors remain unchanged during the passage of the locomotive and that the presence of the red sensor below cell 12 prevents the locomotive from going in this direction.

**Table 1** *Run of the simulation programme corresponding to Figure 22. The active passage correspond to cells 1 up to 11, in this order.*

---

|                                                      |   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| active crossing of a memory switch, left-hand side : |   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                      |   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                             | W | R | B | W | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 1 :                                             | W | W | R | B | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 2 :                                             | W | W | W | R | B | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 3 :                                             | W | W | W | W | R | B | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 4 :                                             | W | W | W | W | W | R | B | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 5 :                                             | W | W | W | W | W | W | R | B | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 6 :                                             | W | W | W | W | W | W | W | R | B | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 7 :                                             | W | W | W | W | W | W | W | W | R | B | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |

---

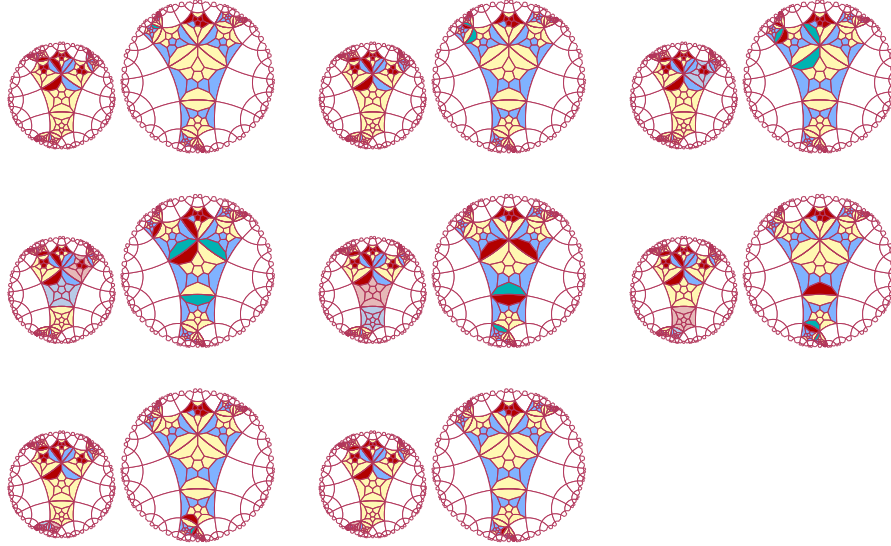

**Figure 23** *The passive crossing of a left-hand side memory switch by the locomotive through the selected track.*

Figure 23 and Table 2 do the same for a passive crossing of a left-hand side memory switch by the locomotive through the selected track. No particularities happen here. Again, the red sensor prevents the locomotive from going into the non-selected track.


Figure 24 and Table 3 represent a passive crossing of a left-hand side memory switch by the locomotive through the non-selected track. With this situation, we have a big difference with the previous figures and tables where the sensors and markers had a passive role. Now, the sensors and the markers play an active role and, at the end of the role, they are exchanged. Accordingly, the locomotive entered a left-hand side memory switch and it leaves a right-hand side memory switch.

**Table 2** Run of the simulation programme corresponding to Figure 23. The passive crossing through the selected track correspond to cells 1 up to 11, in the reverse order.

---

|                                                                                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| passive crossing of a memory switch, left-hand side,<br>through the selected track : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                                                             | W | W | W | W | W | W | W | W | B | R  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 1 :                                                                             | W | W | W | W | W | W | W | B | R | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 2 :                                                                             | W | W | W | W | W | W | B | R | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 3 :                                                                             | W | W | W | W | W | B | R | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 4 :                                                                             | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 5 :                                                                             | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 6 :                                                                             | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 7 :                                                                             | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |

---

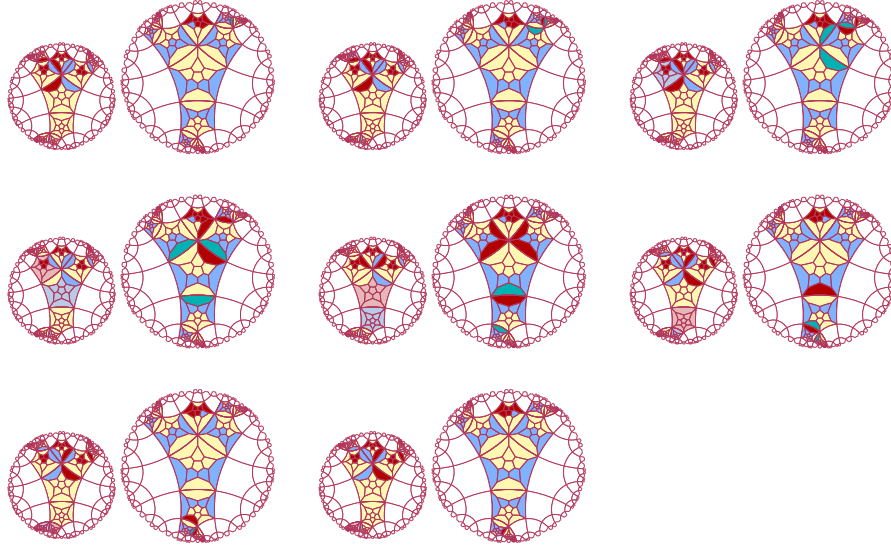


**Figure 24** The passive crossing of a left-hand side memory switch by the locomotive through the non-selected track. Note that after the fifth step, the sensors and markers have exchanged their colours: the memory switch is now a right-hand side one.

Note that Table 3 shows exactly when each sensor and controller is triggered.

The front of the locomotive is in cell 12 at time 2. This makes cell 20 and 18 becoming white. As already noticed, the red sensor cannot change to blue as the blue sensor, which cannot see neither cell 12 nor cell 18, did not yet realized that a change must occur. At time 3, the front of the locomotive is now in the central cell, cell 6, and cells 20 and 18 are now white. This is the signal for both controllers to flash the red signal which will trigger the exchange of colours in the sensors and in the markers. The signal is sent at time 4 and the exchange of colours happens at time 5: starting from that time, the memory switch is now a right-hand side one.

**Table 3** *Run of the simulation programme corresponding to Figure 24. The passive crossing through the non-selected track correspond to cells 12 up to 16, in the reverse order and then to cells 1 up to 6 in the reverse order too.*

|                                                                                          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| passive crossing of a memory switch, left-hand side,<br>through the NON selected track : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|                                                                                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |  |
| time 0 :                                                                                 | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  | B  | R  | B  |  |
| time 1 :                                                                                 | W | W | W | W | W | W | W | W | W | W  | W  | W  | B  | R  | W  | B  | R  | B  | B  | B  | R  | B  |  |
| time 2 :                                                                                 | W | W | W | W | W | W | W | W | W | W  | W  | B  | R  | W  | W  | B  | R  | B  | B  | B  | R  | B  |  |
| time 3 :                                                                                 | W | W | W | W | W | B | W | W | W | W  | R  | W  | W  | W  | W  | B  | W  | B  | W  | R  | B  | B  |  |
| time 4 :                                                                                 | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | B  | W  | R  | R  | R  | B  | B  |  |
| time 5 :                                                                                 | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | B  | R  |  |
| time 6 :                                                                                 | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | B  | R  |  |
| time 7 :                                                                                 | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | B  | R  |  |

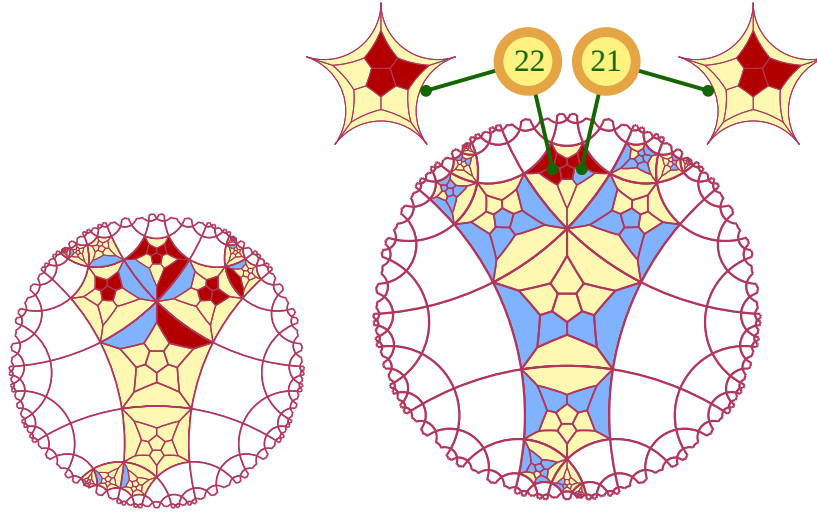


**Figure 25** *Idle configuration of a right-hand side memory switch. Note a situation almost symmetric to that of Figure 21.*

Figure 25 illustrates the idle configuration of a right-hand side memory switch. Note that the configuration is not exactly symmetric with respect to



that of Figure 21. We can notice that the tracks leaving the switch are not symmetric of each other in the common axis of symmetry of the central cell and of cell 20. In fact, the right-hand side track leaving the switch is a rotated image of the left-hand side one: the axis of the 3D rotation is the perpendicular to  $\Pi_0$  raised from the centre of the central tile and the angle is  $\frac{2\pi}{5}$ . The configurations differ by the sensors and the markers which simply exchanged their colours.

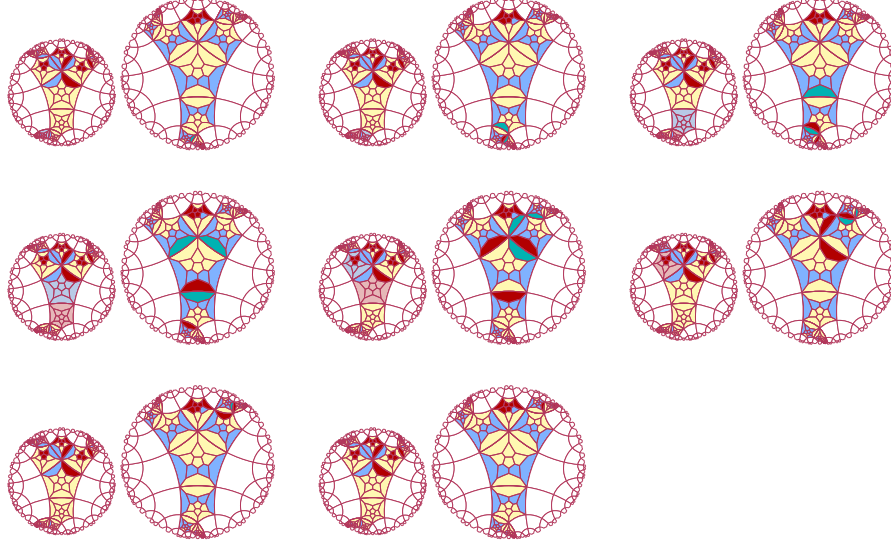


**Figure 26** *The active passage of a right-hand side memory switch by the locomotive. Note that the sensors and markers are just the opposite with respect to Figure 22.*

**Table 4** *Run of the simulation programme corresponding to Figure 26. The active passage correspond to cells 1 up to 6 and then to cells 12 up to 16, always in this order.*

| active crossing of a memory switch, right-hand side : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                                                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                              | W | R | B | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 1 :                                              | W | W | R | B | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 2 :                                              | W | W | W | R | B | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 3 :                                              | W | W | W | W | R | B | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 4 :                                              | W | W | W | W | W | R | W | W | W | W  | W  | B  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 5 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | R  | B  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 6 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | W  | R  | B  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 7 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | R  | B  | W  | R  | B  | B  | B  | B  | R  |

Figures 25, 26, 27 and 28 illustrate the motions of the locomotive in the various crossings of a right-hand side memory switch, while Tables 4, 5 and 6 give traces of executions by the simulation program. There is no essential difference

with respect to the previous figures and tables. The change of sides give rise to the differences which we have already noticed.

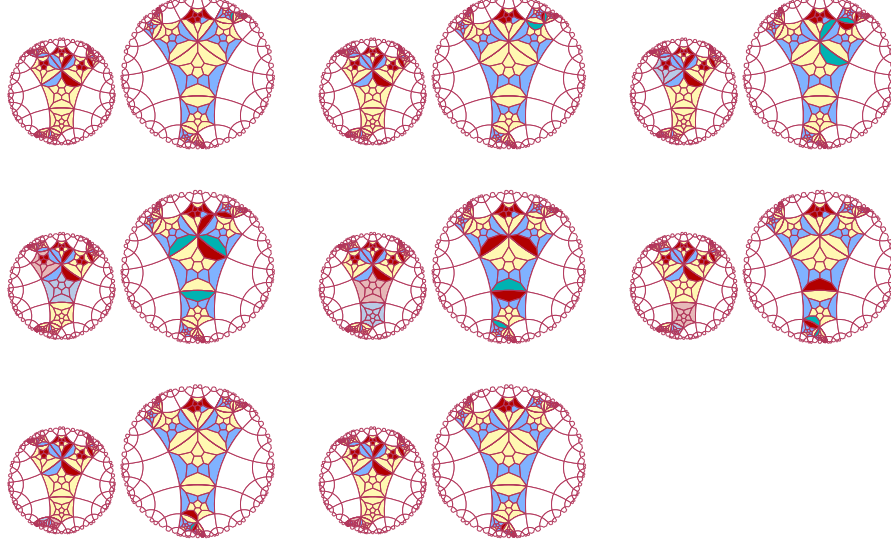

**Figure 27** *The passive crossing of a right-hand side memory switch by the locomotive through the selected track. Note that the sensors and markers are just the opposite with respect to Figure 23 and that the above figure is somehow symmetric to the mentioned one.*

As there is not a true symmetry in the figures and also not in the rules, it is needed to check the correctness of the above described scenario in order to ensure the validity of the construction. In particular, it is important to check that when the locomotive enters a right-hand side memory switch through the non-selected track, it leaves the switch as a left-hand side one.

**Table 5** *Run of the simulation programme corresponding to Figure 27. The passive crossing through the selected track correspond to cells 12 up to 16, in the reverse order and then to cells 1 up to 6 in the reverse order too.*


---

|                                                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|-------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| passive crossing of a memory switch, right-hand side, |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
| through the selected track :                          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|                                                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |   |
| time 0 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | W  | B  | R  | W  | R  | B  | B  | B  | B  | R |
| time 1 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | B  | R  | W  | W  | R  | B  | B  | B  | B  | R |
| time 2 :                                              | W | W | W | W | W | W | W | W | W | W  | W  | W  | B  | R  | W  | W  | W  | R  | B  | B  | B  | B  | R |
| time 3 :                                              | W | W | W | W | W | B | W | W | W | W  | W  | R  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |   |
| time 4 :                                              | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |   |
| time 5 :                                              | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |   |
| time 6 :                                              | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |   |
| time 7 :                                              | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |   |

---

Figure 28 and Table 6 show that this is the case. In particular, the table

shows that the change of colour in the red sensor also occurs at time 3, that the controller flashes at time 4 and that the sensors exchange their colours at time 5.

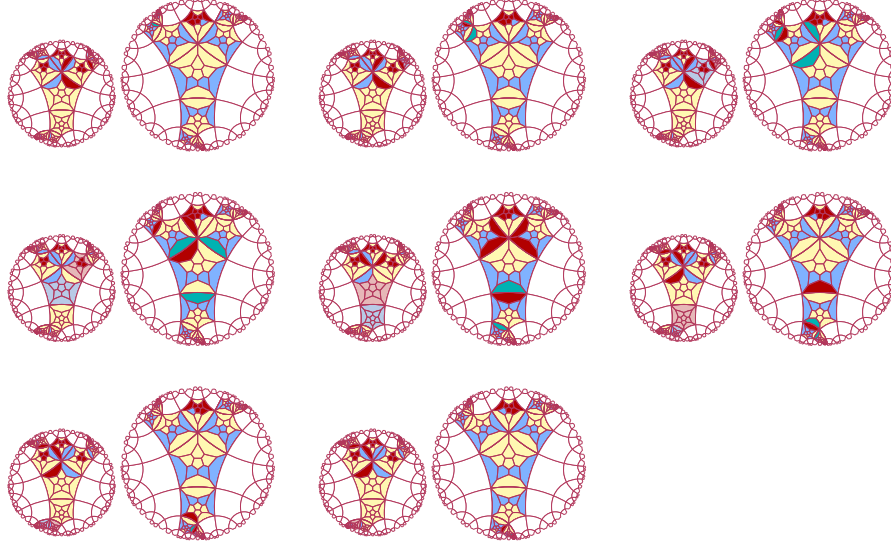

**Figure 28** *The passive crossing of a right-hand side memory switch by the locomotive through the non-selected track. Note that the sensors and markers are just the opposite with respect to Figure 24 and that the above figure is somehow symmetric to the mentioned one.*

*Note that after the fifth step, the sensors and markers have exchanged their colours: the memory switch is now a left-hand side one.*

**Table 6** *Run of the simulation programme corresponding to Figure 28. The passive crossing through the non-selected track correspond to cells 1 up to 11, in the reverse order.*

---

|                                                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| passive crossing of a memory switch, right-hand side, |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
| through the NON selected track :                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                              | W | W | W | W | W | W | W | W | B | R  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 1 :                                              | W | W | W | W | W | W | W | B | R | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 2 :                                              | W | W | W | W | W | W | B | R | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | B  | B  | R  |
| time 3 :                                              | W | W | W | W | W | B | R | W | W | W  | W  | W  | W  | W  | W  | W  | W  | B  | B  | W  | B  | R  |
| time 4 :                                              | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | W  | W  | B  | R  | R  | B  | R  |
| time 5 :                                              | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 6 :                                              | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |
| time 7 :                                              | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | B  | R  | B  |


---

## 5.2 Fixed switches


Figure 29 illustrates the idle configuration of a fixed switch. As announced at the beginning of Section 5 we can see on the figures that the idle configuration of a fixed switch is, in some sense the half of the configuration of a left-hand side memory switch. The point is that there is no lower controller and that the sensors and markers are now fixed milestones. Two of them, cell 18 and 21, are always red and the others, cell 17 and 22 are always blue. Now, the fixed switch keeps the upper controller. As already noticed, the red milestone prevents the locomotive to go through the non-selected track in an active passage. However, as also noticed in the study of memory switches, this does not prevent the passage of the locomotive when it passively comes from the non-selected track and it should work so. Now, the change of colour in the sensor of cell 12 is not enough to prevent the locomotive to go from the central cell both to cell 5, as required, and to cell 7 which should be avoided. Cell 7 cannot itself prevent such a passage because it sees cell 6 but it does not see at the same time cell 12. Now, we have seen in Subsection 5.1 that the upper controller is able to perform this tasks: as soon as it sees that the front of the locomotive is in cell 12, it becomes white. As cell 7 sees this new colour at the same time when the front of the locomotive is in cell 6, it allows it to reject the access of the locomotive to the selected track.

It is not difficult to check that Figure 29 implements this changes. It was just enough to neutralize the lower controller by changing its colour from blue to blank. Moreover, the cell itself has no other non-blank neighbour than the sensors. Similarly, as the sensors and markers are fixed milestones, this means that their neighbours are all blank, except the cell of the switch with which they are in contact: cell 7 or 12 for the sensors, cell 20 for the markers. Consequently, the configuration of the fixed switch is a bit simpler than that of the left-hand side memory switch. It also requires less non-blank cells.

Figures 30, 31 and 32 illustrate the three possible crossings of the switch by the locomotive. Each figure is accompanied by a table which shows a trace of the execution of the simulating program corresponding to that crossing: Table 7 for an active passage, Table 8 for a passive crossing through the selected track and Table 9 for a passive crossing through the non-selected track.

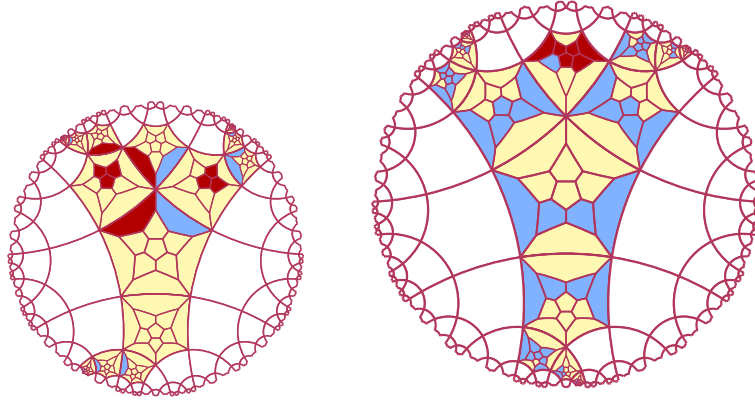

**Figure 29** *The idle configuration of a fixed switch. The big disc is a view from above, the small one a view from below.*

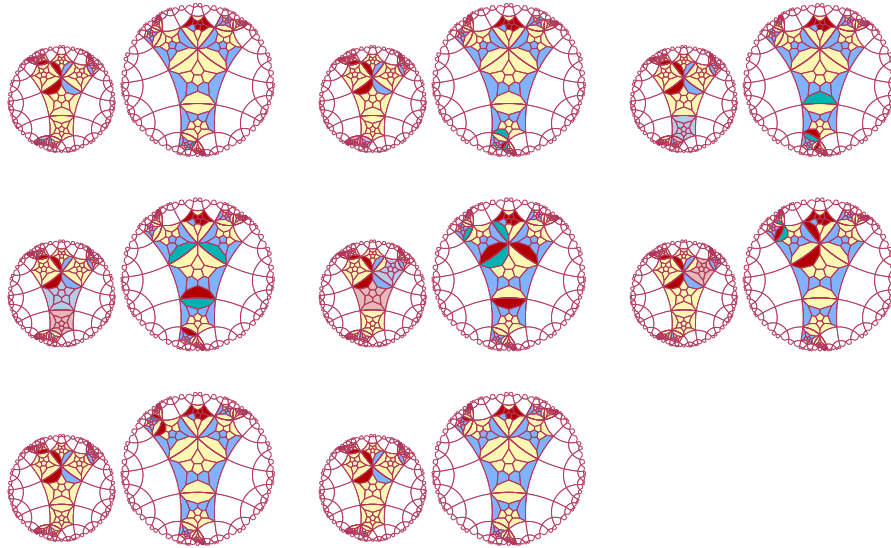


**Figure 30** *The active passage of the locomotive through a fixed switch. Note that the sensors and markers are unchanged.*

**Table 7** Run of the simulation programme corresponding to Figure 30. The active passage corresponds to the visit of cells 1 to 11 in this order.

| active crossing of a fixed switch : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|-------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
|                                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |  |
| time 0 :                            | W | R | B | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 1 :                            | W | W | R | B | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 2 :                            | W | W | W | R | B | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 3 :                            | W | W | W | W | R | B | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 4 :                            | W | W | W | W | W | R | B | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 5 :                            | W | W | W | W | W | W | R | B | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 6 :                            | W | W | W | W | W | W | W | R | B | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 7 :                            | W | W | W | W | W | W | W | W | R | B  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |

The tables allow us to check that the sensors and markers are unchanged as they should do and that for this purpose, it was enough to block their changing by transforming them into milestones. This is a point to which we shall go back in the study of the rules.

Table 9 also allows us to check that a half-control, namely that of cell 20 was enough to guarantee the correct working of the switch. This is an interesting point which shows us another advantage which we can take from the third dimension.

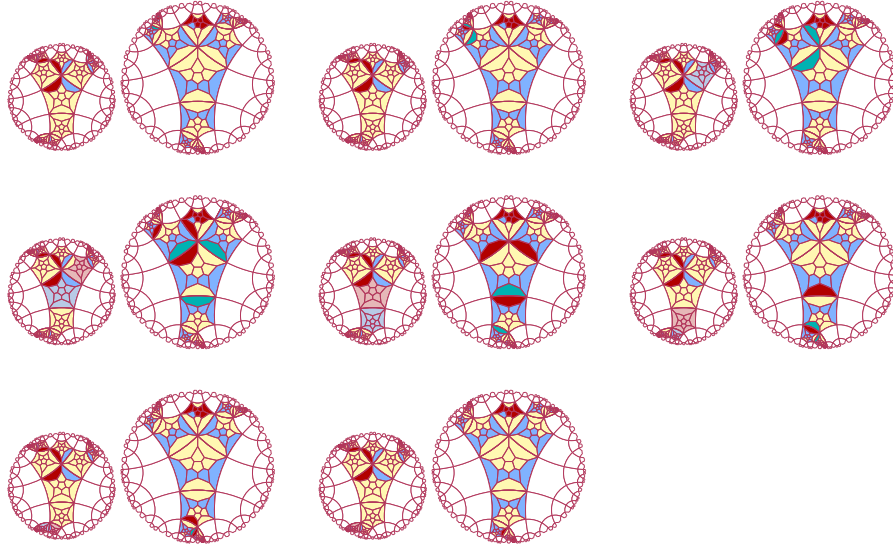

**Figure 31** A passive crossing of a fixed switch by the locomotive from the selected track. Note that the sensors and markers are unchanged.


**Table 8** Run of the simulation programme corresponding to Figure 31. The passive crossing through the selected track correspond to cells 1 up to 11, in the reverse order.

---

|                                                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| passive crossing of a fixed switch, selected track : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                             | W | W | W | W | W | W | W | W | B | R  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 1 :                                             | W | W | W | W | W | W | W | B | R | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 2 :                                             | W | W | W | W | W | W | B | R | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 3 :                                             | W | W | W | W | W | B | R | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 4 :                                             | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 5 :                                             | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 6 :                                             | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |
| time 7 :                                             | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |

---

Indeed, in previous simulations in the hyperbolic plane on the heptagrid, with six or four states, we had a curious phenomenon during the active passage of the locomotive and also during a passive crossing for the fixed switch too. In these simulations, the passage of the locomotive created a duplicate of its front towards the wrong direction. However, as this new front was not followed by a red rear, it was possible to erase it, simply by appending a few rules.

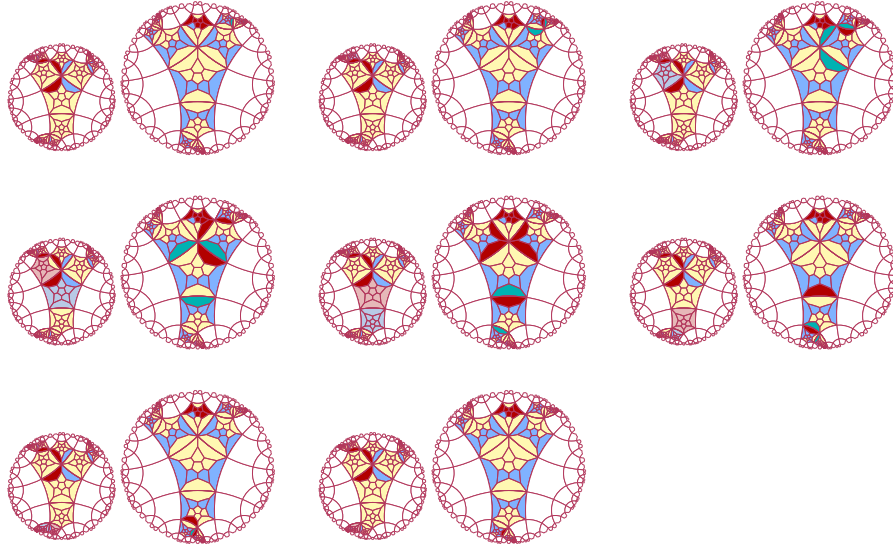

**Figure 32** A passive crossing of a fixed switch by the locomotive from the non-selected track. Note that the sensors and markers are unchanged, although cell 20 reacts as in the case of a memory switch.




**Table 9** Run of the simulation programme corresponding to Figure 32. The passive crossing through the selected track correspond to cells 12 up to 16, in the reverse order and then to cells 1 up to 6 in the reverse order too.

| passive crossing of a fixed switch, NON selected track : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|----------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
|                                                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |  |
| time 0 :                                                 | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | B  | R  | W  | B  | R  | W  | B  | R  | B  |  |
| time 1 :                                                 | W | W | W | W | W | W | W | W | W | W  | W  | W  | B  | R  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 2 :                                                 | W | W | W | W | W | W | W | W | W | W  | W  | B  | R  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 3 :                                                 | W | W | W | W | W | B | W | W | W | W  | W  | R  | W  | W  | W  | W  | B  | R  | W  | W  | R  | B  |  |
| time 4 :                                                 | W | W | W | W | B | R | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | R  | R  | B  |  |
| time 5 :                                                 | W | W | W | B | R | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 6 :                                                 | W | W | B | R | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |
| time 7 :                                                 | W | B | R | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | W  | B  | R  | B  |  |


### 5.3 Flip-flop switches

Figures 33 and 34 show the idle configuration of the flip-flop switches which exist in two versions: the left- and the right-hand side ones. As announced at the beginning of Section 5 we can see on the figures that the idle configuration of a flip-flop switch is, in some sense the half of the configuration of a memory switch of the same laterality. The point is that there is no upper controller and, consequently, no markers. However, the sensors and the lower are still present. The lower controller is exactly the same as in the memory switches and it works in the same way. Contrarily to the fixed switch, the sensors are not milestones. They are true sensors like in the memory switch.

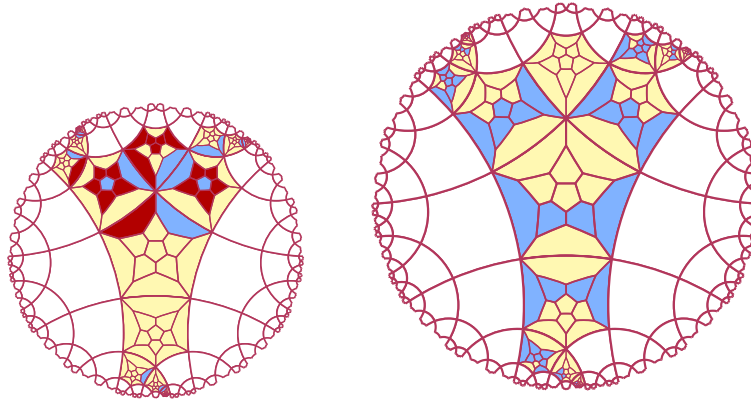

**Figure 33** The idle configuration of the left-hand side flip-flop switch. The big disc is a view from above, the small one, a view from below.




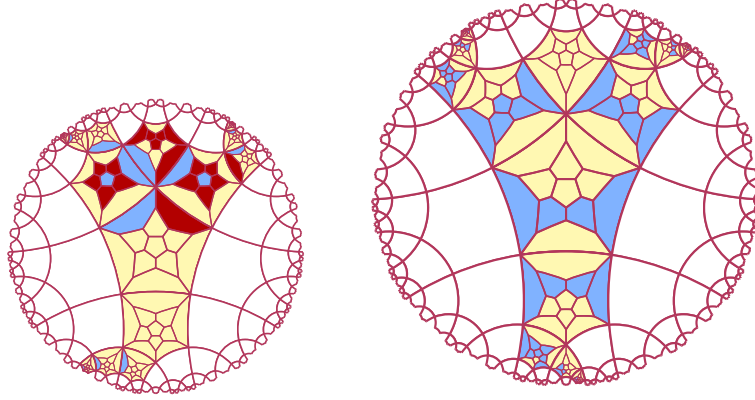

**Figure 34** *The idle configuration of the right-hand side flip-flop switch. The big disc is a view from above, the small one, a view from below.*

However, they are a bit different from the sensors of the memory switch as they work in a different way. The difference can be noticed in the small discs of Figures 21 and 25 and those of Figures 33 and 34. In Figures 21 and 25, the sensors are marked by a group of three red milestones, on pairwise contiguous faces, one of them being the face which is opposite to that in contact with the scanned cell. In Figures 33 and 34, the sensors are marked by a ring of five milestones whose contact faces with the sensor are around the face which is opposite to the face in contact with the scanned cell. Also, the face opposite to that which is shared with the scanned cell is blue as it is in contact with a blue milestone.

This difference is explained by the fact that the working of the sensors is very different from that of the memory switch, quite the opposite: in the memory switch, the blue sensor is passive and the red sensor blocks the access to the non-selected track in the active passage and turns to white when the front of the locomotive appears in the scanned cell in a passive crossing. In the flip-flop switch, the red sensor only blocks the access to the non-selected track and the blue sensor is active: when the front of the locomotive leaves the scanned cell, it becomes white, triggering the flash of the lower controller at the next time which, to its turn, makes the sensors exchange their colour.

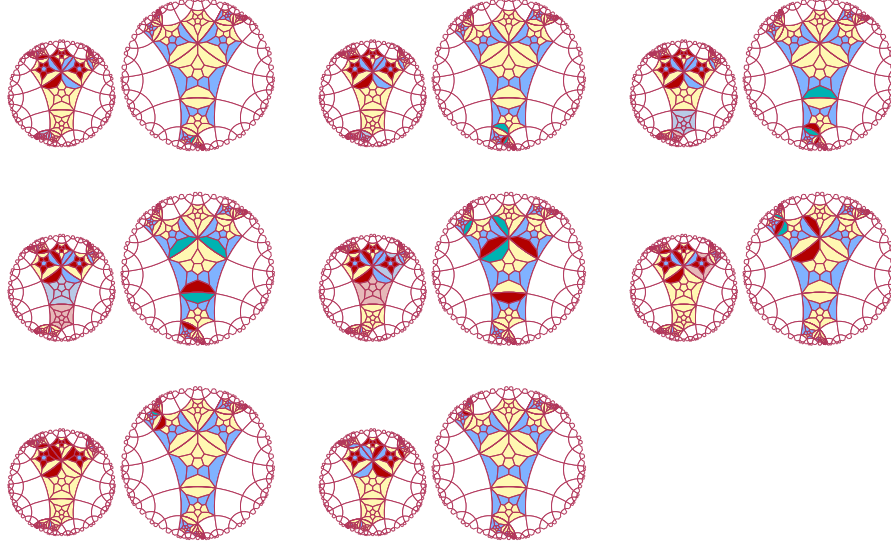


**Figure 35** The active passage of the locomotive through a left-hand side flip-flop switch. Note that the sensors are exchanged when the locomotive leaves the switch, now as a right-hand side flip-flop switch.

**Table 10** Run of the simulation programme corresponding to Figure 35. The active passage visits the cells of the selected track: cells 1 up to 11 in this order.

| active crossing of a left-hand side flip-flop switch : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                                                        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                               | W | R | B | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | W  | W  | W  |
| time 1 :                                               | W | W | R | B | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | W  | W  | W  |
| time 2 :                                               | W | W | W | R | B | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | W  | W  | W  |
| time 3 :                                               | W | W | W | W | R | B | W | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | W  | W  | W  |
| time 4 :                                               | W | W | W | W | W | R | B | W | W | W  | W  | W  | W  | W  | W  | W  | B  | R  | B  | W  | W  | W  |
| time 5 :                                               | W | W | W | W | W | W | R | B | W | W  | W  | W  | W  | W  | W  | W  | W  | R  | B  | W  | W  | W  |
| time 6 :                                               | W | W | W | W | W | W | R | B | W | W  | W  | W  | W  | W  | W  | W  | W  | R  | R  | W  | W  | W  |
| time 7 :                                               | W | W | W | W | W | W | W | R | B | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |

This can be checked in Tables 10 and 11. The front of the locomotive is in the scanned cell at time 4, so that the blue sensor is white at time 5. As in the case of the memory switch, as cell 17 and 18 do not see each other, the blue sensor cannot turn to red immediately. It becomes white which triggers the flash of the controller at time 6 and the exchange of colours between the sensors at time 7 only.

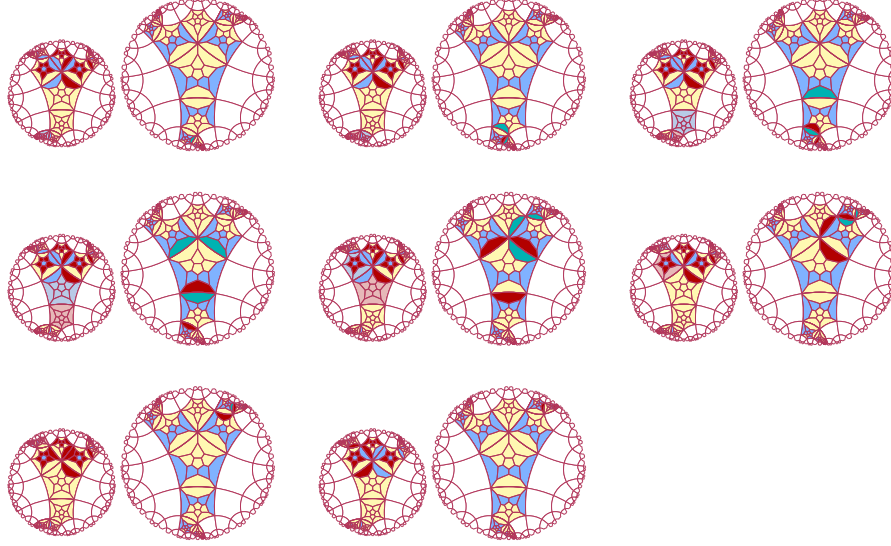

**Figure 36** The active passage of the locomotive through a right-hand side flip-flop switch. Note that the sensors are exchanged when the locomotive leaves the switch, now as a left-hand side flip-flop switch.

**Table 11** Run of the simulation programme corresponding to Figure 36 The active passage visits the cells of the selected track: , here cells 1 up to 6 and then cells 12 up to 16, both in this order.

---


|                                                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| active crossing of a right-hand side flip-flop switch : |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| time 0 :                                                | W | R | B | W | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |
| time 1 :                                                | W | W | R | B | W | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |
| time 2 :                                                | W | W | W | R | B | W | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |
| time 3 :                                                | W | W | W | W | R | B | W | W | W | W  | W  | W  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |
| time 4 :                                                | W | W | W | W | W | R | W | W | W | W  | W  | B  | W  | W  | W  | W  | R  | B  | B  | W  | W  | W  |
| time 5 :                                                | W | W | W | W | W | W | W | W | W | W  | W  | R  | B  | W  | W  | W  | R  | W  | B  | W  | W  | W  |
| time 6 :                                                | W | W | W | W | W | W | W | W | W | W  | W  | R  | B  | W  | W  | W  | R  | W  | R  | W  | W  | W  |
| time 7 :                                                | W | W | W | W | W | W | W | W | W | W  | W  | W  | W  | R  | B  | W  | B  | R  | B  | W  | W  | W  |

---

## 5.4 The circuit

With the implementation of the tracks and the switches, it is possible to give an idea of the implementation of the whole circuit in the hyperbolic 3D space. Remember that the circuit is mainly a two-dimensional one and that the third dimension is used to avoid crossings and to improve the working of the switch mechanisms. This is why a projection on the plane  $\Pi_0$  of the face 5 of most the straight elements may give an idea of the general implementation. To this

purpose, we give in Figure 37 a schematic implementation of the toy program of Figure 4 in the pentagrid, the same figure as in [9]. This figure gives a correct idea of the projection of the implementation onto  $\Pi_0$ .

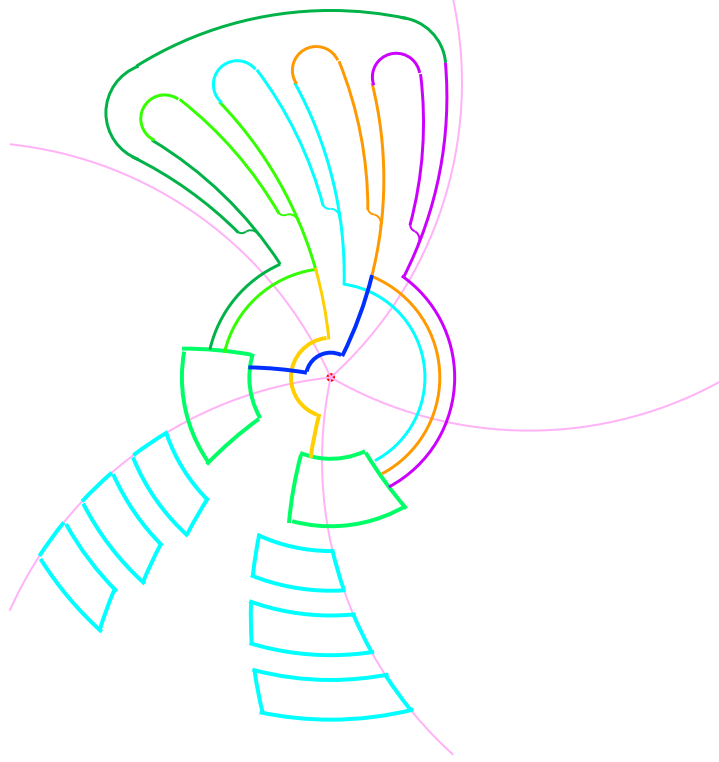

**Figure 37** *A projection of an implementation of the example of a program of a register machine in Figure 4.*

From the figure, we can see that this general organization can be kept for the circuit which we consider. Registers are installed in a quarter, the sequencer of the instructions is installed in another quarter, almost opposite to that of the registers.

## 6 Devising the rules and checking their correctness

Now we arrive to the important part of the paper which consists in listing the rules and in proving their correctness.

In order to write the rules of the cellular automaton, we shall use the numbering of the faces of a dodecahedron which was introduced in Subsection 3.3

and which was used in Subsection 3.4 and in Sections 4 and 5. However, there was no fixed rule to connect the numbering of a cell to that of a neighbouring one except for the cells of the track, as we did in Subsections 4.2 and 4.3. This is not a big problem as, in fact, the rules which we shall devise have an important property: they are **rotation invariant**, which means that they are not changed by a rotation of the faces leaving the dodecahedron globally invariant.

In the plane, the characterization of rotation invariance in the rules is easy to formulate: it is necessary and sufficient that the rules are not changed by a circular permutation on the neighbours. In the case of the pentagrid, this means that once we fixed a rule, we automatically append to the table of rules the other four permuted images of the rule. Here, the characterization is far less trivial. In [7], we could avoid this problem by imposing a stronger condition on the rules, namely to be **strongly lexicographically** different from each other. This means that to each rule, we associate a word of the form  $A_1^{k_1} \dots A_n^{k_n}$  where  $A_1, \dots, A_n$  are the states and  $k_1$  are non-negative numbers satisfying  $k_1 + \dots + k_n = v+1$ , where  $v$  is the number of neighbours of the cell, the cell being not counted. This was possible with 5 states and I could not keep this condition for 3 states. This is why we first study how to check rotation invariance for our cellular automaton in the hyperbolic  $3D$  space.


## 6.1 Rotation invariance

The question is the following: how does a motion which leaves the dodecahedron globally invariant affect the numbering of its faces, an initial numbering being fixed as in Subsection 3.3?

In fact, it is enough to consider products of rotations as we do not consider reflections in planes. The simplest way to deal with this problem is the following. Consider a motion which preserves the orientation, we shall say a **positive** motion. As it leaves the dodecahedron globally invariant, it transforms the face into another one. Accordingly, fix face 0. Then its image can be any face of the dodecahedron, face 0 included. Let  $f_0$  be the image of face 0. Next, fix a second face which shares an edge with face 0, for instance face 1. Then its image  $f_1$  is a face which shares an edge with  $f_0$ . It can be any face sharing a face with  $f_0$ . Indeed, let  $f_2$  be another face sharing an edge with  $f_1$ . Then, composing the considered positive motion with a rotation around  $f_0$  transforming  $f_1$  into  $f_2$ , we get a positive motion which transforms  $(0, 1)$  into  $(f_0, f_2)$ . This proves that we get all the considered positive motion leaving the dodecahedron globally invariant, by first fixing the image of face 0, say  $f_0$  and then by taking any face  $f_1$  sharing an edge with  $f_0$ . Note that once  $f_0$  and  $f_1$  are fixed, the images of the other faces are fixed, thanks to the preservation of the orientation. Accordingly, there are 60 of these positive motions and the argument of the proof shows that they are all products of rotations leaving the dodecahedron globally invariant.

Figure 38 gives an illustrative classification of all these rotations. The upper left picture represents the image of a Schlegel diagram of a dodecahedron with the notation introduced in Subsection 3.3. Each image represents a positive motion. Its characterization is given by the couple of numbers under the image:

it has the form  $f_0 f_1$ , where  $f_0$  is the image of face 0 and  $f_1$  is the image of face 1. The figure represents two sub-tables, each one containing 30 images. Each row represents the possible images of  $f_1$ ,  $f_0$  being fixed. The image of face 0 is the back of the dodecahedron. The image of face 1 is the place of face 1 in Figure 7. As an example,  $f_0 = 0$  for the first row of the left-hand side sub-table, and in the first row, the first image gives  $f_1 = 1$ , so that it represents the identity. The other images of the row represent the rotations around face 0.

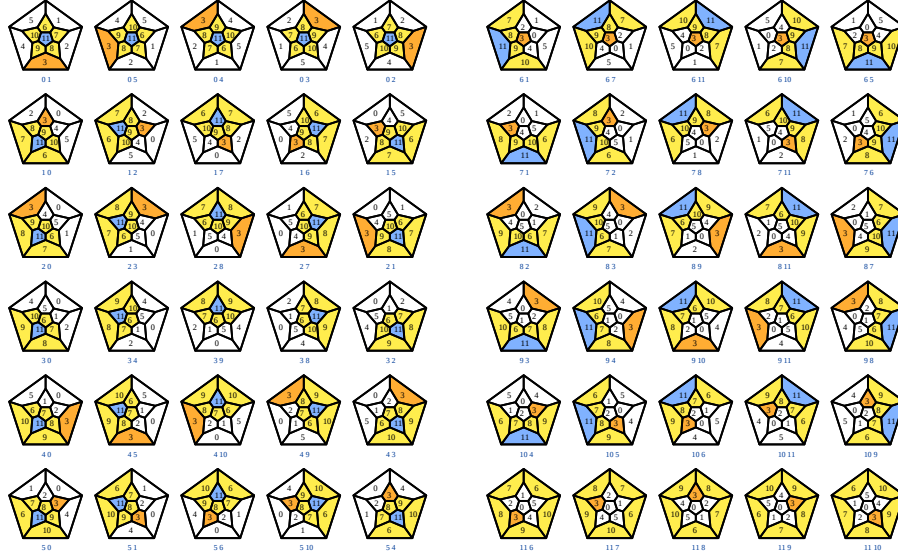

**Figure 38** The map of the positive motions leaving the dodecahedron globally invariant.

**Table 12** The faces around a given face.

|    | 1 | 2 | 3  | 4  | 5  |
|----|---|---|----|----|----|
| 0  | 1 | 5 | 4  | 3  | 2  |
| 1  | 0 | 2 | 7  | 6  | 5  |
| 2  | 0 | 3 | 8  | 7  | 1  |
| 3  | 0 | 4 | 9  | 8  | 2  |
| 4  | 0 | 5 | 10 | 9  | 3  |
| 5  | 0 | 1 | 6  | 10 | 4  |
| 6  | 1 | 7 | 11 | 10 | 5  |
| 7  | 1 | 2 | 8  | 11 | 6  |
| 8  | 2 | 3 | 9  | 11 | 7  |
| 9  | 3 | 4 | 10 | 11 | 8  |
| 10 | 4 | 5 | 6  | 11 | 9  |
| 11 | 6 | 7 | 8  | 9  | 10 |

The construction of Figure 38 was performed by an algorithm using Table 12. For each face of the dodecahedron, the table gives the faces which surround it in the Schlegel diagram, taking the clockwise order when looking at the face from outside the dodecahedron, this order coinciding with increasing indices in each row. This coincides with the usual clockwise order for all faces as in Figure 7, except for face 0 for which the order is counter-clockwise when looking above the plane of the projected image. The principle of the drawings consists in placing  $f_0$  onto face 0 and  $f_1$  onto face 1. The new numbers of the faces are computed by the algorithm as follows. Being given the new numbers  $f_0$  and  $f_1$  of two contiguous faces  $\varphi_0$  and  $\varphi_1$  in the Schlegel diagram, the algorithm computes the position of  $\varphi_1$  as a neighbour of  $\varphi_0$  in the table. This allows to place  $f_1$  on the right face. Then, the algorithm computes the new numbers of the faces which are around  $\varphi_1$  in the table: it is enough to take the position of  $\varphi_0$  as a neighbour of  $\varphi_1$  and then to turn around the neighbours of  $f_1$ , looking at the new numbers in the row  $f_1$  of the table, starting from the position of  $f_0$ . This gives the new numbers of the faces which surround face 1. It is easy to see that we have all faces of the dodecahedron by turning around face 1, then around face 5, then around face 7 and at last around face 8. As in these steps, each round of faces starts from a face whose new number is already computed, the algorithm is able to compute the new numbers for the current round of faces, using Table 12 to find the new numbers. Let us call this algorithm the **rotation algorithm**.

Thanks to the rotation algorithm, it is easy to compute the **rotated forms** of a rule of the cellular automaton.

Let  $\underline{\eta\eta_0\dots\eta_{11}\eta'}$  be a rule of the automaton. In this format,  $\eta$  is the current state of the cell and  $\eta(i)$  is the state of face  $i$  and  $\eta'$  is the new state of the automaton. Remember that the current state of a cell is its state at time  $t$  and that its new state is its state at time  $t+1$ . The number of a neighbour of the cell in the rule is the number of the face which shares this face with the neighbour, the number of the face being defined by the numbering of the faces in the dodecahedron which supports the cell. By assumption, this numbering is a rotated image of the numbering defined by Figure 7 in Subsection 3.3. Later we shall call  $\underline{\eta\eta_0\dots\eta_{11}}$  the **context** of the rule. Let  $\mu$  be a positive motion leaving the dodecahedron globally invariant. The **rotated form** of the rule defined by  $\mu$  is  $\underline{\eta\eta_{\mu(0)}\dots\eta_{\mu(11)}\eta'}$  and, similarly,  $\underline{\eta\eta_{\mu(0)}\dots\eta_{\mu(11)}}$  is the **rotated form** by  $\mu$  of the context of the initial rule. We say that the cellular automaton is **rotation invariant** if and only two rules having contexts which are rotated forms of each other always produce the same new state.

Now, thanks to our study, we have a syntactic criterion to check this property. We fix an order of the states. Then, for each rule, we compute its **minimal form**. This form is obtained as follows. We compute all rotated forms of the rule and, looking at the obtained contexts as words, we take their minimum in the lexicographic order. The minimal form of a rule is obtained by appending its new state to this minimum. Now it is easy to see that:

**Lemma 1** *A cellular automaton on the dodecagrid is rotation invariant if and*

only if for any pair of rules, if their minimal forms have the same context, they have the same new state too.

Now, checking this property can easily be performed thanks to the rotation algorithm.

In the following, we shall successively deal with the rules regarding the tracks and the motion of the locomotive on them, then the rules for the switches and their crossings by the locomotive. In all cases, we shall distinguish between **conservative** rules in which the new state is the same as the current one and **motion** rules in which the new state is different, due to the contribution of the considered cell to the motion of the locomotive. Also, due to the rotation invariance of our set of rules, we shall give only one form for each rule, not necessarily the minimal one.

## 6.2 The rules for the tracks and the motion of the locomotive

The conservative rules for the tracks are given in Table 13. The first rule is the rule of the quiescent state, symbolized by  $W$  in the tables giving the rules. The next two rules are the rule for the cell of the track in a straight element and then for the same cell in a corner. The other rules are for the neighbours of a cell of the track: the rules for a blank neighbour and the rules for a blue milestone. Also, as can be seen on Figures 16 and 17, there are milestones, as those on face 5 and 6 which have a common neighbour which is blank: this explains the rule in the last row of the table. Now, in the last two rules, a cell has at least ten blank neighbours. We shall decide that in such a case, the new state of the rule is the same as its current one and we shall no more display such rules.

**Table 13** *Conservative rules for the tracks: above, the straight element, below, the corner.*

|     | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-----|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| (0) | W  | W | W | W | W | W | W | W | W | W | W | W  | W  | W  |
| (0) | W  | W | W | B | W | W | B | B | B | W | W | W  | W  | W  |
| (0) | W  | W | W | W | B | W | B | B | B | B | W | B  | B  | W  |
| (0) | B  | W | W | W | W | W | W | W | W | W | W | W  | W  | B  |
| (0) | W  | B | W | W | W | W | W | W | W | W | W | W  | W  | W  |
| (0) | W  | B | B | W | W | W | W | W | W | W | W | W  | W  | W  |

NOTE: Above the table we have the number of the faces which number the neighbours of the cell. Number  $-1$  denotes the entry for the current state of the cell itself while number 12 denotes the new state of the cell.

The motion rules for the track are given in Tables 14 and 15.

In Table 14, first, we have four rules for the motion of the locomotive when it enters the cell through entry 1 and leaves it through exit 3. The next two lines deals with the same motion through exit 4: the difference occurs only when the front of the locomotive is again outside the cell, so that in this case, the



first tow lines are the same as when the exit is 3. The other six rules concern the reverse motion: the locomotive enters the cell through exit 3 and then exits

**Table 14** *Motion rules for the straight element.*

|       | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| (1)   | W  | W | B | B | W | W | B | B | B | W | W | W  | W  | B  |
| (2)   | B  | W | R | B | W | W | B | B | B | W | W | W  | W  | R  |
| (3a)  | R  | W | W | B | B | W | B | B | B | W | W | W  | W  | W  |
| (4a)  | W  | W | W | B | R | W | B | B | B | W | W | W  | W  | W  |
| (3b)  | R  | W | W | B | W | B | B | B | B | W | W | W  | W  | W  |
| (4b)  | W  | W | W | B | W | R | B | B | B | W | W | W  | W  | W  |
| (3c)  | R  | W | W | B | W | W | B | B | B | B | W | W  | W  | W  |
| (4c)  | W  | W | W | B | W | W | B | B | B | R | W | W  | W  | W  |
| (3d)  | R  | W | W | B | W | W | B | B | B | W | W | B  | W  | W  |
| (4d)  | W  | W | W | B | W | W | B | B | B | W | W | R  | W  | W  |
| (1ra) | W  | W | W | B | B | W | B | B | B | W | W | W  | W  | B  |
| (2ra) | B  | W | W | B | R | W | B | B | B | W | W | W  | W  | R  |
| (3r)  | R  | W | B | B | W | W | B | B | B | W | W | W  | W  | W  |
| (4r)  | W  | W | R | B | W | W | B | B | B | W | W | W  | W  | W  |
| (1rb) | W  | W | W | B | W | B | B | B | B | W | W | W  | W  | B  |
| (2rb) | B  | W | W | B | W | R | B | B | B | W | W | W  | W  | R  |
| (1rc) | W  | W | W | B | W | W | B | B | B | B | W | W  | W  | B  |
| (2rc) | B  | W | W | B | W | W | B | B | B | R | W | W  | W  | R  |
| (1rd) | W  | W | W | B | W | W | B | B | B | W | W | B  | W  | B  |
| (2rd) | B  | W | W | B | W | W | B | B | B | W | W | R  | W  | R  |

NOTE: 1, 2, 3 and 4 indicates the four times of the passage of the locomotive through the element. At time 1, the front of the locomotive is seen by the element. At time 2, the front is in the element. At time 3 the rear is in the element. At time 4 the rear is about to be out of scope of the element. The letter *r* indicates the reverse motion. Letters *a*, *b*, *c* and *d* refer to exits 3, 4, 8 and 10 respectively.

**Table 15** *Motion rules for the corner.*

|      | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| (1a) | W  | W | B | W | B | W | B | B | B | B | W | B  | B  | B  |
| (2a) | B  | W | R | W | B | W | B | B | B | B | W | B  | B  | R  |
| (3a) | R  | W | W | B | B | W | B | B | B | B | W | B  | B  | W  |
| (4a) | W  | W | W | R | B | W | B | B | B | B | W | B  | B  | W  |
| --   |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1r) | W  | W | W | B | B | W | B | B | B | B | W | B  | B  | B  |
| (2r) | B  | W | W | R | B | W | B | B | B | B | W | B  | B  | R  |
| (3r) | R  | W | B | W | B | W | B | B | B | B | W | B  | B  | W  |
| (4r) | W  | W | R | W | B | W | B | B | B | B | W | B  | B  | W  |

NOTE: 1, 2, 3 and 4 have the same meaning as in Table 14. The letter *a* indicates the motion from 1 to 2 and the letter *r* indicates the reverse motion.

through exit 1 in the four first rows of this group and it enters through exit 4 in the last two lines, the required instructions when the rear of the locomotive is

in the cell and then leaves it being the same as when the locomotive enters the cell through exit 3. The rules for cells using other exits, as 8 or 10 are exactly similar: the other exit is always 1 as already mentioned in Subsection 4.1.

As visible from Table 15, there are less rules in this case. There are only two exits: 1 and 2, which gives rise to one way and the reverse motion only.

### 6.3 The rules for the memory switches

Again, the rules are split into conservative and motion ones. Table 16 shows these rules for the memory switch, both for a left-hand side one or a right-hand side one. The first two rules concern cells 7 and 12 as can be seen by the occurrence of a non blank neighbour through face 0. We can see the presence of an additional milestone as this was announced in the figures regarding memory switches. The next four rules concern the sensors under track 3 and under track 4. The next two rules concern the upper controller, then the following two rules deal with the lower controller. The last two rules concern the markers of the upper controller. Note that the central cell itself do not require additional rules as it is a straight element.

**Table 16** *Conservative rules for the switches.*

|           | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-----------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| (0-7)     | W  | B | W | B | W | W | B | B | B | W | W | W  | B  | W  |
| (0-12)    | W  | R | W | B | W | W | B | B | B | W | W | W  | B  | W  |
| (0-17)    | B  | W | W | B | W | W | W | W | W | W | R | R  | R  | B  |
| (0-17)    | R  | W | W | B | W | W | W | W | W | W | R | R  | R  | R  |
| (0-18)    | B  | W | W | W | W | W | B | W | W | R | R | W  | R  | B  |
| (0-18)    | R  | W | W | W | W | W | B | W | W | R | R | W  | R  | R  |
| (0-20)    | B  | B | W | R | W | W | R | R | R | R | W | B  | R  | B  |
| (0-20)    | B  | B | W | R | W | W | R | R | R | B | W | R  | R  | B  |
| (0-19)    | B  | B | W | R | B | R | R | R | R | W | W | W  | R  | B  |
| (0-19)    | B  | B | W | R | R | B | R | R | R | W | W | W  | R  | B  |
| (0-21-22) | B  | B | W | W | W | W | W | W | W | W | R | R  | R  | B  |
| (0-21-22) | R  | B | W | W | W | W | W | W | W | W | R | R  | R  | R  |

NOTE: The number indicated after 0 is the number of the cell to which the rule applies. Remember that 0 itself is the mark of the conservative rules

Note that the rules needed by the red neighbours of the controllers, the sensors and the markers of the controllers have at least ten blank neighbours and, consequently, they are conservative.

Now, let us turn to the rules needed by the motions of the locomotive. They are displayed in Tables 17, 18 and 19.

Table 17 displays the rules of the motion of the locomotive in cells 7 and 12 which are the cells contiguous to the exits of the central cell. We know that the configuration of these cells is particular. With respect to a straight element,

we have an additional blue milestone on face 11 and we have the addition of a sensor on face 0. Cells 7 and 12 have never a sensor of the same colour. In an idle situation, one sensor is blue, the other is red. This situation remains unchanged during an active crossing of the switch by the locomotive or when the latter performs a passive crossing through the selected track. This can be seen in the table where the rules are those of the straight element, see Table 14, except the occurrence of the new colours on face 11 and face 0.

**Table 17** *Rules for the motions of the locomotive across a memory switch for cells 7 and 12.*

|                                                         | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---------------------------------------------------------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| <b>active crossing:</b>                                 |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)                                                     | W  | B | B | B | W | W | B | B | B | W | W | W  | B  | B  |
| (2)                                                     | B  | B | R | B | W | W | B | B | B | W | W | W  | B  | R  |
| (3)                                                     | R  | B | W | B | W | B | B | B | B | W | W | W  | B  | W  |
| (4)                                                     | W  | B | W | B | W | R | B | B | B | W | W | W  | B  | W  |
| <b>passive crossing through the selected track:</b>     |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)                                                     | W  | B | W | B | W | B | B | B | B | W | W | W  | B  | B  |
| (2)                                                     | B  | B | W | B | W | R | B | B | B | W | W | W  | B  | R  |
| (3)                                                     | R  | B | B | B | W | W | B | B | B | W | W | W  | B  | W  |
| (4)                                                     | W  | B | R | B | W | W | B | B | B | W | W | W  | B  | W  |
| (5)                                                     | W  | W | W | B | W | W | B | B | B | W | W | W  | B  | W  |
| <b>passive crossing through the non-selected track:</b> |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)                                                     | W  | R | W | B | W | B | B | B | B | W | W | W  | B  | B  |
| (2)                                                     | B  | R | W | B | W | R | B | B | B | W | W | W  | B  | R  |
| (4)                                                     | W  | B | R | R | W | W | B | B | B | W | W | W  | B  | W  |
| (5)                                                     | W  | W | R | R | W | W | B | B | B | W | W | W  | B  | W  |
| (6)                                                     | W  | W | R | B | W | W | R | B | B | W | W | W  | B  | W  |
| (7)                                                     | W  | B | R | B | W | W | R | B | B | W | W | W  | B  | W  |
| <b>blocking effect of the red sensor:</b>               |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1c)                                                    | W  | R | B | B | W | W | B | B | B | W | W | W  | B  | W  |
| (2c)                                                    | W  | R | R | B | W | W | B | B | B | W | W | W  | B  | W  |
| <b>blocking effect of a blank upper controller:</b>     |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1d)                                                    | W  | B | B | B | W | W | W | B | B | W | W | W  | B  | W  |
| (2d)                                                    | W  | B | R | B | W | W | W | B | B | W | W | W  | B  | W  |
| (1e)                                                    | W  | B | B | W | W | W | B | B | B | W | W | W  | B  | W  |
| (2e)                                                    | W  | B | R | W | W | W | B | B | B | W | W | W  | B  | W  |

NOTE: Note that the rule  $R\ W\ B\ W\ W\ W\ B\ B\ B\ W\ W\ W\ B\ W$  does not appear in the rules for the passive crossing through the non-selected track as it is a rotated form of a motion rule of a straight element.

The last instructions of the table, starting from those devoted to the passive crossing of the locomotive through the non-selected track are more intricate.

The instructions of this group control the blocking effect of the red sensor in the active crossing and in the passive crossing through the selected track. They also control the passive effect of the red sensor during the crossing when the

locomotive arrives from the non-selected track. It is interesting to remark that the rule which allows the rear of the locomotive to leave cell 12 to the central cell is not present in the table because it is a rotated form of a rule already used in the straight element. Indeed, the rule is of the form  $\underline{R} \ X \ B \ W \ W \ Y \ B \ B \ B \ W \ W \ B \ \underline{W}$ , where  $x$  and  $y$  are the respective state of cell 18 and cell 20. Now, when  $x$  and  $y$  are both  $w$ , we have the rule  $\underline{R} \ W \ B \ W \ W \ W \ B \ B \ B \ W \ W \ B \ \underline{W}$  which is a rotated form of the rule  $\underline{R} \ W \ B \ B \ W \ W \ B \ B \ B \ W \ W \ W \ \underline{W}$ , which occurs at the line (3r) of Table 14. We can notice that the latter form is obtained from the former one by the rotation labelled (10 9) in Figure 38.

At last, note the structure of the rules labelled (1d), (2d), (1e) and (2,e). These rules show the blocking effect of cell 20 when it is white: this prevents the locomotive to enter on the wrong track.

**Table 18** *Rules for the motions of the locomotive across a memory switch for the sensors: cells 17 and 18.*

|          | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|----------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| cell 17: |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1a)     | B  | B | W | B | W | W | W | W | W | W | R | R  | R  | B  |
| (2a)     | B  | R | W | B | W | W | W | W | W | W | R | R  | R  | B  |
| (3a)     | B  | W | W | R | W | W | W | W | W | W | R | R  | R  | R  |
| (1b)     | R  | B | W | B | W | W | W | W | W | W | R | R  | R  | W  |
| (2b)     | W  | R | W | B | W | W | W | W | W | W | R | R  | R  | W  |
| (3b)     | W  | W | W | R | W | W | W | W | W | W | R | R  | R  | B  |
| cell 18: |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (2a)     | B  | R | W | W | W | W | B | W | W | R | R | W  | R  | B  |
| (1b)     | R  | B | W | W | W | W | B | W | W | R | R | W  | R  | W  |
| (2b)     | W  | R | W | W | W | W | B | W | W | R | R | W  | R  | W  |
| (4b)     | W  | W | W | W | W | W | B | W | W | R | R | W  | R  | W  |

Table 18 gives the rules which control the behaviour of the sensors in the memory switch. There are two kinds of rules: one for cell 17, the other for cell 18, although the working of these cells is the same. However, their configuration are not rotated from one another: they are symmetric. Indeed, cell 19 is seen from face 5 by cell 18 and from face 2 by cell 17. This is why we have two sets of rather similar rules. However, note that a few rules for cell 17 also work for cell 18 as we have less rules for the latter. On the rules of Table 18, we can see the implementation of the scenario depicted in Subsection 5.1 explaining the reason why a blue sensor cannot directly turn to red.

Table 19 gives the complement of this implementation by giving the rules which govern both controllers. First, the lower controller, and then the upper one. We also have four rules for the markers of the upper controller: the rules which do not change the colours when cell 20 is blank and the rules needed to exchange the colours when cell 20 is red.

It should not be surprising to see that there are many rules for the upper controller. In fact, the change of position in the colours of the markers, which

are symmetric with respect to the plane of self-reflection of cell 20 considered without its markers, forces us to produce two sets of very similar rules: one for each position of the markers. Also, the upper controller sees both cells 7 and 12 which requires additional rules. In comparison, the lower controller sees only cells 17 and 18 which makes its job simpler and requires a smaller number of rules.

**Table 19** *Rules for the motions of the locomotive across a memory switch for the controllers and their markers: cells 19, 20, 21 and 22.*

|                  | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| cell 19:         |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1a)             | B  | B | W | R | B | W | R | R | R | W | W | W  | R  | R  |
| (2a)             | R  | B | W | R | B | W | R | R | R | W | W | W  | R  | B  |
| (1b)             | B  | B | W | R | W | B | R | R | R | W | W | W  | R  | R  |
| (2b)             | R  | B | W | R | W | B | R | R | R | W | W | W  | R  | B  |
| (1c)             | B  | W | W | R | B | W | R | R | R | W | W | W  | R  | R  |
| (2c)             | R  | R | W | R | B | W | R | R | R | W | W | W  | R  | B  |
| (1d)             | B  | W | W | R | W | B | R | R | R | W | W | W  | R  | R  |
| (1d)             | R  | R | W | R | W | B | R | R | R | W | W | W  | R  | B  |
| cell 20:         |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1a)             | B  | B | W | R | W | B | R | R | R | R | W | B  | R  | B  |
| (2a)             | B  | B | W | R | W | R | R | R | R | R | W | B  | R  | B  |
| (1b)             | B  | B | W | R | B | W | R | R | R | R | W | B  | R  | W  |
| (2b)             | W  | B | W | R | R | W | R | R | R | R | W | B  | R  | R  |
| (3b)             | R  | B | W | R | W | W | R | R | R | R | W | B  | R  | B  |
| (1c)             | B  | B | W | R | B | W | R | R | R | B | W | R  | R  | B  |
| (2c)             | B  | B | W | R | R | W | R | R | R | B | W | R  | R  | B  |
| (1b)             | B  | B | W | R | W | B | R | R | R | B | W | R  | R  | W  |
| (2b)             | W  | B | W | R | W | R | R | R | R | B | W | R  | R  | R  |
| (3b)             | R  | B | W | R | W | W | R | R | R | B | W | R  | R  | B  |
| (4b)             | R  | R | W | R | W | B | R | R | R | R | W | B  | R  | B  |
| (5b)             | R  | R | W | R | W | W | R | R | R | R | W | B  | R  | B  |
| (6b)             | B  | R | W | R | W | W | R | R | R | B | W | R  | R  | B  |
| (7b)             | R  | R | W | R | W | W | R | R | R | B | W | R  | R  | B  |
| cells 21 and 22: |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1a)             | B  | W | W | W | W | W | W | W | W | W | R | R  | R  | B  |
| (2a)             | R  | W | W | W | W | W | W | W | W | W | R | R  | R  | R  |
| (1b)             | B  | R | W | W | W | W | W | W | W | W | R | R  | R  | R  |
| (2b)             | R  | R | W | W | W | W | W | W | W | W | R | R  | R  | B  |

## 6.4 The rules for the fixed switch

As mentioned in Subsection 5.2, the working of the fixed switches makes us of the mechanism of an upper controller whose markers are fixed: it will do the job to prevent the locomotive arriving from the non-selected track to be duplicated in the wrong way. As the markers are fixed, the controller cannot change it,

even if it flashes. As now markers are milestones, they are indifferent to the flashes of the controller. This is why we have a very few rules to append to what has already been settled for the memory switches, see Table 20. Now, the sensors are also changed to milestones and the lower controller disappeared. This entails a few changes in the rules as a few rules of cells 7 and 12 have to be changed as well as a few rules of cell 20 whose neighbour sharing its face 0 is now always blank.

**Table 20** *Rules for the motions of the locomotive across a memory switch for the controllers and their markers: cells 19, 20, 21 and 22.*

|                        | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------------------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| <b>cells 7 and 12:</b> |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (3)                    | R  | R | B | W | W | W | B | B | B | W | W | W  | B  | W  |
| (4)                    | W  | R | R | R | W | W | B | B | B | W | W | W  | B  | W  |
| <b>cell 20:</b>        |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (0)                    | B  | W | W | R | W | W | R | R | R | R | W | B  | R  | B  |
| (1)                    | B  | W | W | R | W | B | R | R | R | R | W | B  | R  | B  |
| (2)                    | B  | W | W | R | W | R | R | R | R | R | W | B  | R  | B  |
| (3)                    | B  | W | W | R | B | W | R | R | R | R | W | B  | R  | W  |
| (4)                    | W  | W | W | R | R | W | R | R | R | R | W | B  | R  | R  |
| (5)                    | R  | W | W | R | W | W | R | R | R | R | W | B  | R  | B  |

## 6.5 The rules for the flip-flop switch

In Table 21, we have the conservative rules which are specific to the flip-flop switches. This comes from the fact that although the flip-flop switch takes from the memory switch its lower mechanism, it also changes a bit the working of this mechanism.

**Table 21** *Rules for the motions of the locomotive across a flip-flop switch.*

|                 | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-----------------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| <b>cell 17:</b> |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (0)             | B  | W | W | B | W | W | W | R | R | R | R | R  | B  | B  |
| (0)             | R  | W | W | B | W | W | W | R | R | R | R | R  | B  | R  |
| <b>cell 18:</b> |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (0)             | B  | W | W | W | W | W | B | R | R | R | R | R  | B  | B  |
| (0)             | R  | W | W | W | W | W | B | R | R | R | R | R  | B  | R  |
| <b>cell 19:</b> |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (0)             | B  | W | W | R | R | B | R | R | R | W | W | W  | R  | B  |
| (0)             | B  | W | W | R | B | R | R | R | R | W | W | W  | R  | B  |

We have seen in Subsection 5.3 that the sensors, again red and blue, work in a different way: the role of the colours is somehow reversed. This means

that the rules for cells 17 and 18 must be new: the change of the blue sensor to white is now triggered by seeing the front of the locomotive through face 0. This is also why the patterns of the neighbours of these cells is different from their patterns in the memory switch. Also, as the upper controller disappeared, the neighbour of cell 19 through face 0 is always blank. Even if its rules are basically the same as in memory switches, they have to be changed for what is the neighbour through face 0. All these features appear in Table 22.

**Table 22** *Rules for the motions of the locomotive across a flip-flop switch.*

|                 | -1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-----------------|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| cells 7 and 12: |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (4)             | R  | W | W | B | W | B | B | B | B | W | W | W  | B  | W  |
| (5)             | W  | W | W | B | W | R | B | B | B | W | W | W  | B  | W  |
| cell 17:        |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)             | B  | B | W | B | W | W | W | R | R | R | R | R  | B  | W  |
| (2)             | W  | R | W | B | W | W | W | R | R | R | R | R  | B  | W  |
| (3)             | W  | W | W | R | W | W | W | R | R | R | R | R  | B  | R  |
| (4)             | R  | W | W | R | W | W | W | R | R | R | R | R  | B  | B  |
| cell 18:        |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)             | B  | B | W | W | W | W | B | R | R | R | R | R  | B  | W  |
| (2)             | W  | R | W | W | W | W | B | R | R | R | R | R  | B  | W  |
| (3)             | W  | W | W | W | W | W | R | R | R | R | R | R  | B  | R  |
| cell 19:        |    |   |   |   |   |   |   |   |   |   |   |    |    |    |
| (1)             | B  | W | W | R | W | R | R | R | R | W | W | W  | R  | R  |
| (1a)            | B  | W | W | R | R | W | R | R | R | W | W | W  | R  | R  |
| (1a)            | B  | W | W | R | B | W | R | R | R | W | W | W  | R  | R  |
| (2b)            | R  | W | W | R | W | B | R | R | R | W | W | W  | R  | B  |
| (2c)            | R  | W | W | R | B | W | R | R | R | W | W | W  | R  | B  |
| (1d)            | B  | W | W | R | W | B | R | R | R | W | W | W  | R  | R  |
| (6a)            | R  | W | W | R | W | R | R | R | R | W | W | W  | R  | B  |
| (6b)            | R  | W | W | R | R | W | R | R | R | W | W | W  | R  | B  |

NOTE: There is one rule less for cell 18 than for rule 17. This comes from the fact that the rule (4) for cell 17 also works for cell 18 as it is a rotated image of the rule needed for cell 18 in a similar situation.

## 6.6 About the computer program

As indicated in the introduction, I wrote a computer program in order to check the correctness of the rules. The program was written in *ADA95* and it implements the algorithms mentioned in the paper.

Before giving a short account on the program itself, I would like to stress that using a simulation program for this purpose is mandatory. The computations are so complex for a man, at least for me, that the help of the computer allows me to check that the rules are correct. What is meant by this latter expression? We mean two things: a syntactical one and a semantic one. The syntactical correctness is that there is no pair of rules with the same context

giving rise to different new states. This is the minimal condition when working with deterministic cellular automata, which is of course the case here. In this work, we reinforced the condition by checking that two rules with the same minimal context always give rise to the same new state: this guarantees that the automaton is not only correct, but that it is also rotation invariant.

Now, the semantic correctness means that the rules do what we expect from them to do. This is far more complex to check and this cannot be completely ascertained by proof. Again, the computer program is useful in this regard. We can implement the simulation in the program and then run it. If everything goes smoothly through, we can believe that the implementation is correct. There is no guarantee of that. There is no automatic checking that the implementation is a correct hyperbolic implementation. There is also no proof that the program itself is correct. However, the setting is rather involved and while adjusting the program, many errors in my first table of rules were found by the program. As an example, the program also indicated me the need to cover face 11 of cells 7 and 12 with a blue milestone: otherwise, the set of rules would not be rotationally invariant.

**Table 23** *Two pieces of the big trace of the program, corresponding to the simulation of an active passage of the locomotive through a left-hand side memory switch, at initial time.*

|    |    |   |    |   |    |    |    |    |   |    |   |    |    |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
|----|----|---|----|---|----|----|----|----|---|----|---|----|----|----|----|----|----|---|---|----|----|---|---|----|---|----|----|----|
| 6  | -1 | 0 | 1  | 2 | 3  | 4  | 5  | 6  | 7 | 8  | 9 | 10 | 11 | 17 | B  | W  | W  | B | W | W  | W  | W | W | R  | R | R  |    |    |
|    |    |   | W  | W | W  | B  | W  | W  | B | B  | B | W  | W  | W  |    | f  | v  | f | v | f  | f  | f | f | f  | f | f  |    |    |
|    |    |   | v  | f | v  | f  | v  | v  | f | f  | f | f  | f  | f  | 7  |    | 19 |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | 5  |   |    | 7  | 12 |    |   |    |   |    |    |    | 18 | R  | W  | W | W | W  | W  | B | W | W  | R | R  | W  | R  |
| 7  | W  | B | W  | B | W  | W  | B  | B  | B | W  | W | W  | B  |    |    | f  | v  | f | f | f  | f  | v | f | f  | f | f  | f  | f  |
|    |    |   | v  | v | v  | f  | f  | v  | v | f  | f | f  | f  | f  | 12 |    |    |   |   |    | 19 |   |   |    |   |    |    |    |
|    |    |   | 17 | 6 |    |    | 8  | 20 |   |    |   |    |    |    | 19 | B  | B  | W | R | B  | R  | R | R | W  | W | W  | W  | R  |
| 8  | W  | W | W  | B | W  | W  | B  | B  | B | W  | W | W  | W  |    |    | f  | v  | f | f | v  | v  | f | f | f  | f | f  | f  | f  |
|    |    |   | v  | f | v  | f  | f  | v  | f | f  | f | f  | f  | f  | 20 |    |    |   |   | 17 | 18 |   |   |    |   |    |    |    |
|    |    |   | 7  |   |    | 9  |    |    |   |    |   |    |    |    | 20 | B  | B  | W | R | W  | W  | R | R | R  | R | W  | B  | R  |
| 9  | W  | W | W  | B | W  | W  | B  | B  | B | W  | W | W  | W  |    |    | f  | v  | f | f | v  | v  | f | f | f  | v | f  | v  | f  |
|    |    |   | v  | f | v  | f  | f  | v  | f | f  | f | f  | f  | f  | 19 |    |    |   |   | 12 | 7  |   |   | 21 |   | 22 |    |    |
|    |    |   | 8  |   |    | 10 |    |    |   |    |   |    |    |    | 21 | -1 | 0  | 1 | 2 | 3  | 4  | 5 | 6 | 7  | 8 | 9  | 10 | 11 |
| 10 | W  | W | W  | B | W  | W  | B  | B  | B | W  | W | W  | W  |    |    | R  | B  | W | W | W  | W  | W | W | W  | R | R  | R  | R  |
|    |    |   | v  | f | v  | f  | f  | v  | f | f  | f | f  | f  | f  |    | v  | v  | f | f | f  | f  | f | f | f  | f | f  | f  | f  |
|    |    |   | 9  |   |    | 11 |    |    |   |    |   |    |    |    | 20 |    |    |   |   |    |    |   |   |    |   |    |    |    |
| 11 | -1 | 0 | 1  | 2 | 3  | 4  | 5  | 6  | 7 | 8  | 9 | 10 | 11 | 22 | B  | B  | W  | W | W | W  | W  | W | W | W  | R | R  | R  | R  |
|    |    |   | W  | W | W  | B  | W  | W  | B | B  | B | W  | W  | W  |    | v  | v  | f | f | f  | f  | f | f | f  | f | f  | f  | f  |
|    |    |   | v  | f | v  | f  | f  | f  | f | f  | f | f  | f  | f  | 20 |    |    |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | 10 |   |    |    |    |    |   |    |   |    |    |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
| 12 | W  | R | W  | B | W  | W  | B  | B  | B | W  | W | W  | B  |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | v  | v | v  | v  | f  | v  | f | f  | f | f  | f  | f  |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | 18 | 6 | 20 |    |    |    |   | 13 |   |    |    |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
| 13 | W  | W | W  | B | W  | W  | B  | B  | B | W  | W | W  | W  |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | v  | f | v  | f  | f  | v  | f | f  | f | f  | f  | f  |    |    |    |   |   |    |    |   |   |    |   |    |    |    |
|    |    |   | 12 |   |    | 14 |    |    |   |    |   |    |    |    |    |    |    |   |   |    |    |   |   |    |   |    |    |    |

About the program implementation itself.



First, I implemented the algorithms to compute the minimal form of a rule and, taking advantage of this implementation, the programme computed the PostScript program for Figure 38. All traces given in the tables of Section 5 were computed during the execution of the program by the program itself.

Each test of a crossing of the switch by the locomotive was performed within the same implementation frame: the cells of the tracks were gathered in a table of tables. The big table has 22 entries corresponding to the numbering of the cells explained in Section 5. For each index of the big table, a table of 14 entries gives various information on the cell in its current state, and its neighbours. The neighbours correspond to faces and are numbered from 0 up to 11 as in the paper. For each face, it is indicated whether the neighbour through the face has a permanent state or a variable one. As an example, a milestone seen from a face of a cell of the track is permanently blue. When the neighbour has a variable state, the table indicates the index of this neighbour in the big table. In fact, the big table is first a list of the variable cells and, at this occasion, it collects a useful information about each cell. The program also computes a bigger trace where at each time, the big table is dispatched in full detail. Table 23 gives two short pieces of this trace, taken during an active passage of the locomotive, at time 1. We can see the information which was just indicated,  $v$  meaning 'variable' and  $f$  meaning 'fixed'. The other indications are self-explaining.

As the program performed a successful execution of all possible crossings and also along various vertical and horizontal segments with some mix of them, we can conclude that the proof of theorem 1 is complete. ■

## 7 Conclusion

With this result, we are very close to the limit which amounts to two states. As noticed in the introduction, the result proved in this paper can be obtained very 'easily' by using a rather trivial implementation of rule 110 which is now known as weakly universal. The present proof is much simpler, although its checking involved a computer program. By the way, it is also the case of rule 110 and if we compare the programming effort needed for rule 110 together with cost in time and space of the executions of the programme with the corresponding issues needed for this paper, the programming effort and the execution costs of the program in the case of this paper are much less than what was needed for rule 110. This is also why the present proof is much simpler, which of course, does not diminish at all the merit of the discoverers of rule 110.

Moreover, the automaton constructed in this proof is truly a 3D-one. As mentioned in the introduction, the third dimension is used to avoid the crossings, which spares a lot of instructions. Also, as noticed in Section 5, the third dimension allows us to perform the fixed and the memory switches without the side effect of inconveniences which were noticed in the plane.

Accordingly, there is some work ahead, probably the hardest as we are now close to the goal.

## References

- [1] M. Cook. Universality in elementary cellular automata, *Complex Systems*, (2004), **15**(1), 1-40.
- [2] F. Herrmann, M. Margenstern, A universal cellular automaton in the hyperbolic plane, *Theoretical Computer Science*, (2003), **296**, 327-364.
- [3] M. Margenstern, Implementing Cellular Automata on the Triangular Grids of the Hyperbolic Plane for New Simulation Tools, **ASTC'2003**, (2003), Orlando, March, 29- April, 4.
- [4] M. Margenstern, The tiling of the hyperbolic  $4D$  space by the 120-cell is combinatoric, *Journal of Universal Computer Science*, **10**(9), (2004), 1212-1238.
- [5] M. Margenstern, Two railway circuits: a universal circuit and an NP-difficult one, *Computer Science Journal of Moldova*, **9**, 1–35, (2001).
- [6] M. Margenstern, Tilings of hyperbolic spaces: the splitting method and group theory, **WORDS'2003**, TUCS General Publications, **43**, (2003), 31-35.
- [7] M. Margenstern, A universal cellular automaton with five states in the 3D hyperbolic space, *Journal of Cellular Automata* **1**(4), (2006), 315-351.
- [8] M. Margenstern, Cellular Automata in Hyperbolic Spaces, Volume 1, Theory, *OCP*, Philadelphia, (2007), 422p.
- [9] M. Margenstern, Cellular Automata in Hyperbolic Spaces, Volume 2, Implementation and computations, *OCP*, Philadelphia, (2008), 360p.
- [10] M. Margenstern, A new universal cellular automaton on the ternary heptagrid, *arXiv:0903.2108[cs.FL]*, (2009), 35pp.
- [11] M. Margenstern, G. Skordev, Tools for devising cellular automata in the hyperbolic 3D space, *Fundamenta Informaticae*, **58**, N°2, (2003), 369-398.
- [12] M. Margenstern, Y. Song, A universal cellular automaton on the ternary heptagrid, *Electronic Notes in Theoretical Computer Science*, **223**, (2008), 167-185.
- [13] M. Margenstern, Y. Song, A new universal cellular automaton on the pentagrid, *Parallel Processing Letters*, **19**(2), (2009), 227-246.
- [14] D.M.Y. Sommerville, An introduction to the geometry of  $N$  dimensions, Dover Publ. Inc., New-York, 1958.
- [15] I. Stewart, A Subway Named Turing, Mathematical Recreations in *Scientific American*, (1994), 90-92.
- [16] S. Wolfram. A new kind of science, *Wolfram Media, Inc.*, (2002).